

it courseware™

TRAINING MATERIALS FOR IT PROFESSIONALS

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited



Test-Driven Development Using Visual Studio and MSTest Rev. 5.0

Student Guide

Information in this document is subject to change without notice. Companies, names and data used in examples herein are fictitious unless otherwise noted. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Object Innovations.

Product and company names mentioned herein are the trademarks or registered trademarks of their respective owners.



™ is a trademark of Object Innovations.

Author: Robert J. Oberg

Copyright ©2021 Object Innovations Enterprises, LLC All rights reserved.

Object Innovations
877-558-7246
www.objectinnovations.net

Printed in the United States of America.

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Table of Contents (Overview)

Chapter 1	Test-Driven Development
Chapter 2	Visual Studio Unit Testing Fundamentals
Chapter 3	More about MSTest Framework
Appendix A	Learning Resources

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Directory Structure

- **The course software installs to the root directory**
C:\OIC\UnitCs.
 - Example programs for each chapter are in named subdirectories of chapter directories **Chap01**, **Chap02**, and so on.
 - A cumulative case study is provided in the directory **CaseStudy**.
 - The **Labs** directory contains one subdirectory for each lab, named after the lab number. Starter code is frequently supplied, and answers are provided in the chapter or case study directories.
 - The **Demos** directory is provided for in-class demonstrations led by the instructor.

Table of Contents (Detailed)

Chapter 1 Test-Driven Development.....	1
Test-Driven Development.....	3
Functional Tests.....	4
Unit Tests.....	5
Test Automation.....	6
Rules for TDD.....	7
Implications of TDD.....	8
Simple Design.....	9
Refactoring.....	10
Regression Testing.....	11
Test List.....	12
Red/Green/Refactor.....	13
Using the MSTest Framework.....	14
Testing with MSTest.....	15
MSTest Test Drive.....	16
IQueue Interface and Stub Class.....	17
Test List for Queue.....	18
Demo: Testing QueueLib.....	19
A Second Test.....	24
More Queue Functionality.....	25
TDD with Legacy Code.....	26
Acme Travel Agency Case Study.....	27
Acme Example Program.....	28
Lab 1.....	29
Summary.....	30
Chapter 2 Visual Studio Unit Testing Fundamentals.....	37
Structure of Unit Tests.....	39
Assertions.....	40
Assert Example.....	41
Unit Testing Framework.....	43
Lab 2A.....	44
Unit Testing Framework Namespace.....	45
Assert Class.....	46
Assert.AreEqual().....	47
More Assert Methods.....	48
CollectionAssert Class.....	49
StringAssert Class.....	50
Test Case.....	51
Test Methods.....	52
Test Class.....	53
Test Runner.....	54

Ignoring Tests	55
Demo: Multiple Test Classes	56
Using the Ignore Attribute	58
Test Initialization and Cleanup	59
Test Initialization Example	60
Class Initialization and Cleanup	61
Running Test Initialization Example	62
Lab 2B.....	63
Summary	64
Chapter 3 More about MSTest Framework.....	75
Queue Example Program	77
Expected Exceptions	78
Exception Settings	79
Enqueue and Dequeue.....	80
Tests for Enqueue and Dequeue	81
ToArray()	82
Test of ToArray().....	83
Expected Exception Tests.....	84
Lab 3A	85
Custom Asserts	86
Custom Assert Example.....	87
Implementing a Custom Assert.....	89
Running Custom Assert Example.....	90
Playlists.....	91
Debugging Unit Tests	94
Running Selected Tests.....	95
Running Tests at the Command Line.....	96
Refactoring.....	97
Collection Class Implementation.....	98
Testing the New Version	100
Lab 3B.....	101
Summary	102
Appendix A Learning Resources	113

Chapter 1

Test-Driven Development

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Test-Driven Development

Objectives

After completing this unit you will be able to:

- **Explain the principles of test-driven development or TDD.**
- **Describe the main types of tests pertaining to TDD:**
 - Functional tests, also known as customer tests
 - Unit tests, also known as programmer tests
- **Discuss the role of test automation in the development process.**
- **Outline the principles of simple design.**
- **Describe the use of refactoring in improving software systems and the role of test automation in support of refactoring.**
- **Describe MSTest in Visual Studio.**
- **Explain the use of TDD in working with legacy code.**

Test-Driven Development

- ***Test-driven development (TDD)* calls for writing test cases *before* functional code.**
 - You write no functional code until there is a test that fails because the function is not present.
- **The test cases embody the requirements that the code must satisfy.**
- **When all test cases pass, the requirements are met.**
- **Both the test cases and the functional code are incrementally enhanced, until all the requirements are specified in tests that the functional code passes.**
- **Functional code is enhanced for two reasons:**
 - To satisfy additional requirements
 - To improve the quality and maintainability of the code, a process known as **refactoring**.
- **Passing the suite of tests ensures that refactoring has not caused regression.**

Functional Tests

- **The best known type of tests is *functional tests*, which verify that functional requirements of the end system are satisfied.**
 - Such tests are also called **customer tests** or **acceptance tests**.
 - They are customer-facing tests.
- **Functional tests are run against the actual user interface of the running system.**
- **Functional tests may either be run manually by human testers, or they may be automated.**
- **Typical automation is to capture keystrokes and mouse movements, which can then be replayed.**
- **Various commercial test automation tools exist.**

Unit Tests

- ***Unit tests* are tests of specific program components.**
 - They are programmer-facing and are also called **programmer tests**.
- **Because there is no specific user interface for program components, testing requires some kind of test harness.**
 - This test harness must either be written specifically for the program, or a general purpose test harness may be used.
- **Besides the test harness, specific test cases must be written.**
- **Because these tests are programmer-facing, it is desirable if the tests can be specified in a familiar programming language.**
 - It is especially desirable if the test cases can be written in the same programming language as the functional code.
- **In this course we will write both functional code and test code in C#.**

Test Automation

- **A key success factor in using TDD is a system for test automation.**
- **Tests must be run frequently after each incremental change to the program, and the only way this is feasible is for the tests to be automated.**
- **There are many commercial and open source test automation tools available.**
- **A particular effective family of test automation tools are the unit test frameworks patterned after the original JUnit for Java:**

JUnit

Java

NUnit

.NET

MSTest

xTest

cppUnit

C++

PHPUnit

PHP

PyUnit

Python

Test::Unit

Ruby

JsUnit

JavaScript

Rules for TDD

- **Kent Beck, the father of eXtreme Programming (XP), suggested two cardinal rules for TDD:**
 - Never write any code for which you do not have a failing automated test.
 - Avoid all duplicate code.
- **The first rule ensures that you do not write code that is not tested.**
 - And if you provide tests for all your requirements, the rule ensures that you do not write code for something which is not a requirement.
- **The second rule is a cardinal principle of good software design.**
 - Duplicate code leads to inconsistent behavior over a period of time, as code is changed in one place but not in a duplicated place.

Implications of TDD

- **TDD has implications for the development process.**
 - You design in an organic manner, and the running code provides feedback for your design decisions.
 - As a programmer you write your own tests, because you can't wait for someone in another group to write frequent small tests for you.
 - You need rapid response from your development environment, in particular a fast compiler and a regression test suite.
 - Your design should satisfy the classical desiderata of highly cohesive and loosely-coupled components in order to make testing easier. Such a design is also easier to maintain.

Simple Design

- **Your program should both do *no less* and *no more* than the requirements demand.**
 - No less, because otherwise the program will not meet the functional requirements.
 - No more, because extra code imposes both a development and a maintenance burden.
- **You may find the following guidelines¹ useful:**
 - Your code is appropriate for its intended audience.
 - Your code passes all its tests.
 - Your code communicates everything it needs to.
 - Your code has the minimum number of classes that it needs.
 - Your code has the minimum number of methods that it needs.

¹ *Test-Driven Development in Microsoft .NET* by James V. Newkirk and Alexei A. Vorontsov.

Refactoring

- **The traditional waterfall approach to software development puts a great deal of emphasis on upfront design.**
 - Sound design is important in any effective methodology, but the agile approach emphasizes being responsive to change.
- **The *no more* principle suggests that you do not make your program more general than dictated by its current requirements.**
 - Future requirements may or may not come along the lines you anticipate.
- **The pitfall of incremental changes is that, if not skillfully done, the structure of the program may gradually fall apart.**
- **The remedy is to not only make functional changes, but when appropriate to *refactor* your program.**
 - This means to improve the program without changing its functionality.

Regression Testing

- **A pitfall of refactoring is that you may break something.**
 - A natural inclination is to follow the adage, “if it’s not broken, don’t fix it.”
- **And, as we said, incremental changes to a program may lead to a deterioration of the program’s quality.**
- **So do go ahead and make refactoring improvements to your program, but be sure to test thoroughly after each change.**
- **Run the complete test suite to ensure that there has been no regression.**
- **As part of program maintenance, whenever you fix a bug, add a test to the test suite to test for this bug.**
 - Thus your test suite becomes gradually more and more robust, and you can have increased confidence that indeed your refactoring improvements will not break anything.

Test List


- **TDD begins with a *test list*.**
 - A test list is simply a list of tests for a program component or feature, expressed in ordinary English.
- **The test list describes the program component's requirements unambiguously.**
- **The test list provides a precise definition of the completion criteria.**
 - The requirements are met when all the tests in the test list pass.


Red/Green/Refactor

- **You implement the tests in the test list by a process that is sometimes called *Red/Green/Refactor*.**
 - You work in small, verifiable steps that provide immediate feedback².
 1. Write the test code.
 2. Compile the test code. It should fail, because there is not yet any corresponding functional code.
 3. Implement enough functional code for the test code to compile.
 4. Run the test and see it fail (red).
 5. Implement enough functional code for the test code to pass.
 6. Run the test and see it pass (green).
 7. Refactor for clarity and to eliminate duplication.
 8. Repeat from the top.
- **Working in small steps enables you to immediately detect mistakes, and to see where the mistake occurred.**
 - You will rarely need the debugger!

² William Wake, *Extreme Programming Explored*.

Using the MSTest Framework


- **With .NET 5.0 Microsoft's MSTest Framework can be easily used for unit testing in .NET languages such as C#.**
 - The framework comes with Visual Studio, including the free Visual Studio Community 2019.
- **It uses red (X) and green (check mark) to indicate failing and passing tests.**
 - The example shows the results of running a test suite for a Queue component, with Dequeue method not implemented.
 - The example is in **Chap01\MyQueue\NoDequeue**.
 - To run all the tests, open the Test Explorer from the Test menu of Visual Studio. Then click the  toolbar button.

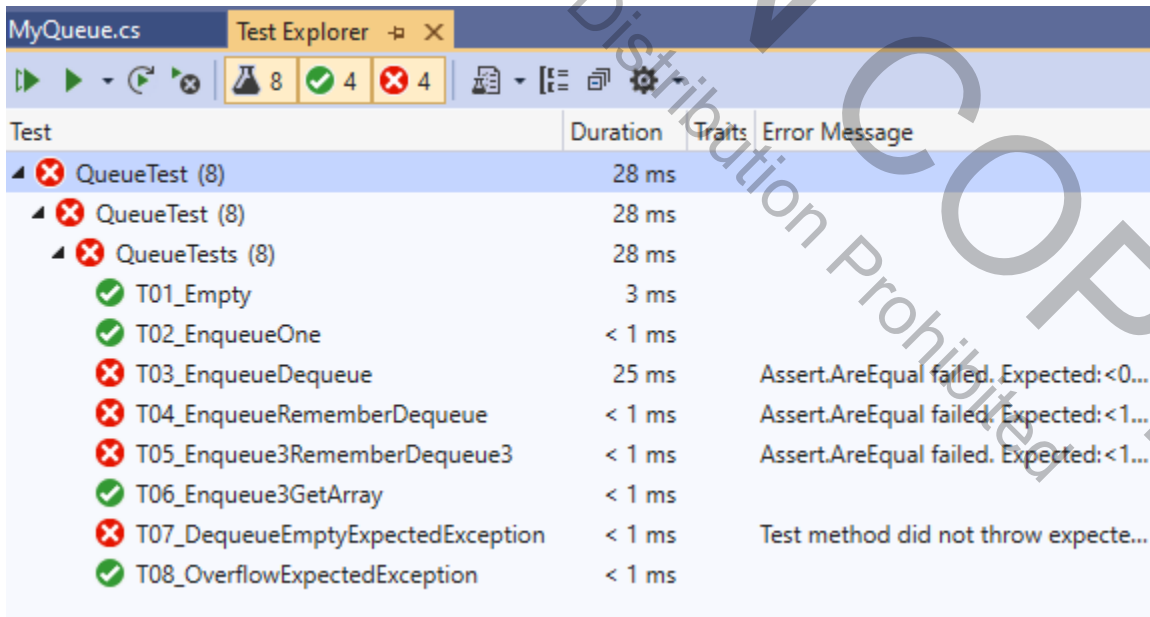

Test	Duration	Traits	Error Message
QueueTest (8)	28 ms		
QueueTest (8)	28 ms		
QueueTests (8)	28 ms		
T01_Empty	3 ms		
T02_EnqueueOne	< 1 ms		
T03_EnqueueDequeue	25 ms		Assert.AreEqual failed. Expected:<0...
T04_EnqueueRememberDequeue	< 1 ms		Assert.AreEqual failed. Expected:<1...
T05_Enqueue3RememberDequeue3	< 1 ms		Assert.AreEqual failed. Expected:<1...
T06_Enqueue3GetArray	< 1 ms		
T07_DequeueEmptyExpectedException	< 1 ms		Test method did not throw expecte...
T08_OverflowExpectedException	< 1 ms		

Testing with MSTest

- The diagram³ illustrates how programmers doing TDD typically work using MSTest.

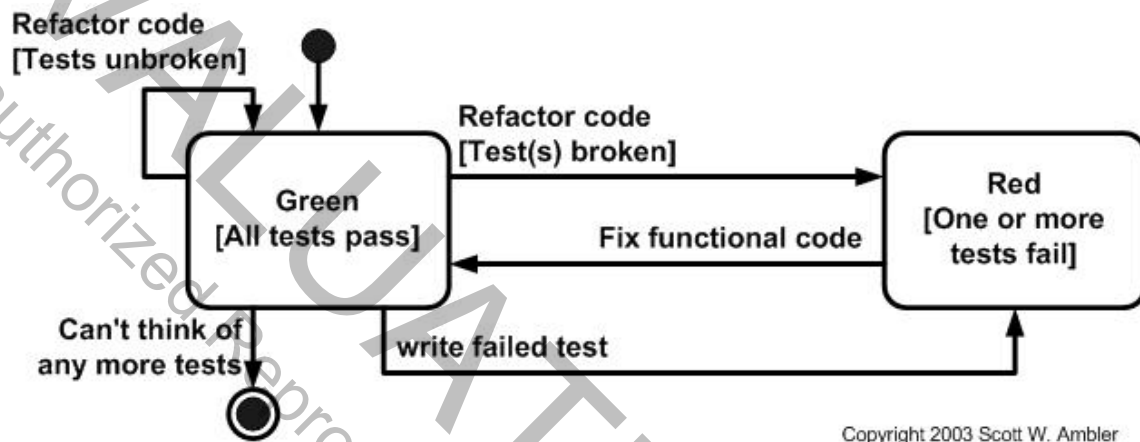

1. Write a test case that will fail because functional code is not yet implemented (test first).
2. Run, and you will get red.
3. Fix the functional code and run again until you get green.
4. Keep writing test cases that will fail, implement the functional code, and get green.
5. At any point you may refactor for code improvements, and you need to make sure that you still get green.
6. When you can't think of any more tests, you are done!

³ This diagram is reproduced by permission of the author, Scott Ambler. See <http://www.agiledata.org/essays/tdd.html>.

MSTest Test Drive

- **Let's illustrate TDD by a simple example.**
 - Don't worry about the details of using the Unit Testing Framework but focus on the conceptual process of TDD.
- **Our program component is a FIFO (first-in, first-out) queue.**
 - The **Count** property returns number of elements in queue.
 - New items are inserted at the rear of the queue by the **Enqueue()** method.
 - Items are removed from the front of the queue by the **Dequeue()** method.
 - A method **ToArray()** returns all the items in the queue, with the front item at index 0.
- **We'll go through the following steps:**
 1. Specify a .NET interface and provide a class with a stub implementation of the interface.
 2. Create our test list, which is the specification of requirements.
 3. Implement our first test and see it fail.
 4. Implement the test code required to make the first test pass.
 5. Implement the second test and see it fail.
 6. Implement the test code to make the second test pass.
 7. Repeat until all the tests pass.

IQueue Interface and Stub Class

- See the **QueueLib** class library project in the solution **Demos\MyQueue**, backed up in **Chap01\MyQueue\Step0**.


```
namespace QueueLib
{
    interface IQueue
    {
        int Count { get; }
        void Enqueue(int x);
        int Dequeue();
        int[] ToArray();
    }
    public class MyQueue : IQueue
    {
        public MyQueue(int size)
        {
        }
        public int Count
        {
            get
            {
                return -1;
            }
        }
        public void Enqueue(int x)
        {
        }
        public int Dequeue()
        {
            return 0;
        }
        public int[] ToArray()
        {
            return null;
        }
    }
}
```

Test List for Queue


1. Create a queue of capacity 3 and verify Count is 0. (All subsequent tests will also create a queue of capacity 3.)
2. Enqueue a number and verify that Count is 1.
3. Enqueue a number, dequeue it, and verify that Count is 0.
4. Enqueue a number, remember it, dequeue a number and verify that the two numbers are equal.
5. Enqueue three numbers, remember them, dequeue them, and verify that they are correct.
6. Dequeue an empty queue and verify you get an underflow exception.
7. Enqueue four numbers and verify you get an overflow exception.
8. Enqueue three numbers, get an array of numbers in queue and verify it is correct.
9. Enqueue two numbers, dequeue them. Enqueue three numbers, get an array of numbers in queue and verify it is correct.
10. Enqueue two numbers, dequeue them. Enqueue three numbers, remember them, dequeue them, and verify that they are correct.

Demo: Testing QueueLib

1. Open the **MyQueue** solution in **Demos\MyQueue**. Build the solution, which at this point consists only of a class library.
2. Find the template for MSTest Test Project (.NET Core). Click Next.

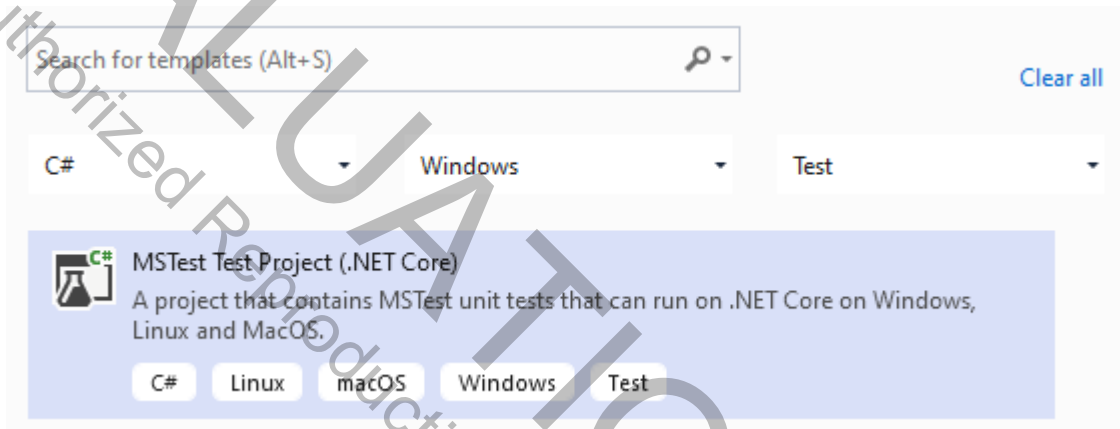

3. Assign name **QueueTest** to the new project. Click Create.

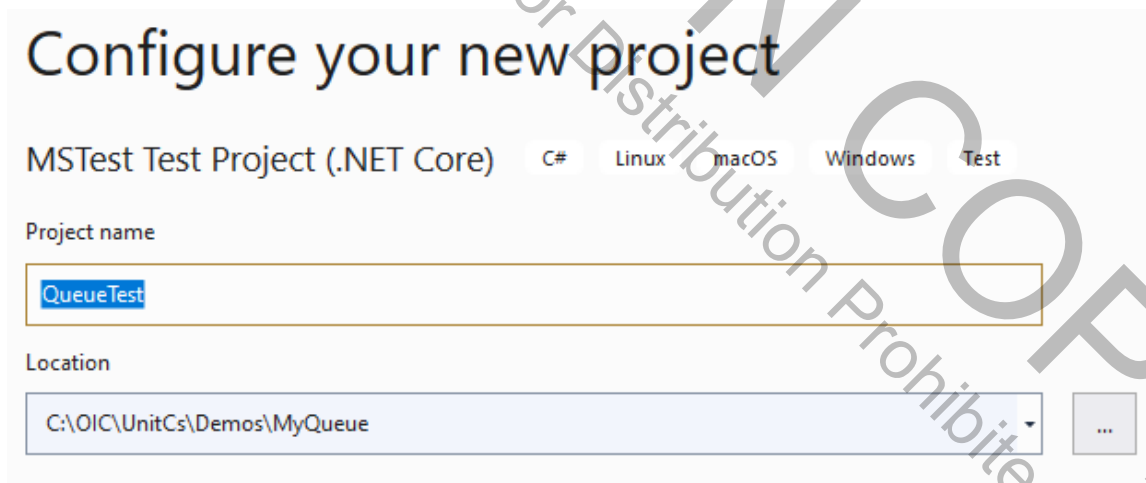

Demo: Testing QueueLib (Cont'd)

4. Change the name of the file **UnitTest1.cs** in the new project to **QueueTests.cs** and let Visual Studio change the class name.
5. Right-click over the project and select Properties.
6. Change the Target Framework to .NET 5.0

Assembly name:	Default namespace:
<input type="text" value="QueueTest"/>	<input type="text" value="QueueTest"/>
Target framework:	Output type:
<input type="text" value=".NET 5.0"/>	<input type="text" value="Console Application"/>

7. Edit the supplied stub test method in **QueueTests.cs**.

```
using Microsoft.VisualStudio.TestTools.UnitTesting;
```

```
namespace QueueTest
```

```
{
```

```
    [TestClass]
```

```
    public class QueueTests
```

```
    {
```

```
        [TestMethod]
```

```
        public void T01_Empty()
```

```
        {
```

```
            MyQueue que = new MyQueue(3);
```

```
            Assert.AreEqual(0, que.Count);
```


```
        }
```

```
    }
```

```
}
```

Demo: Testing QueueLib (Cont'd)

- Build the solution. You will get a compile error, because the **MyQueue** class cannot be found by the test project.
- In the **QueueTest** project add a Project Reference to the **QueueLib** project.

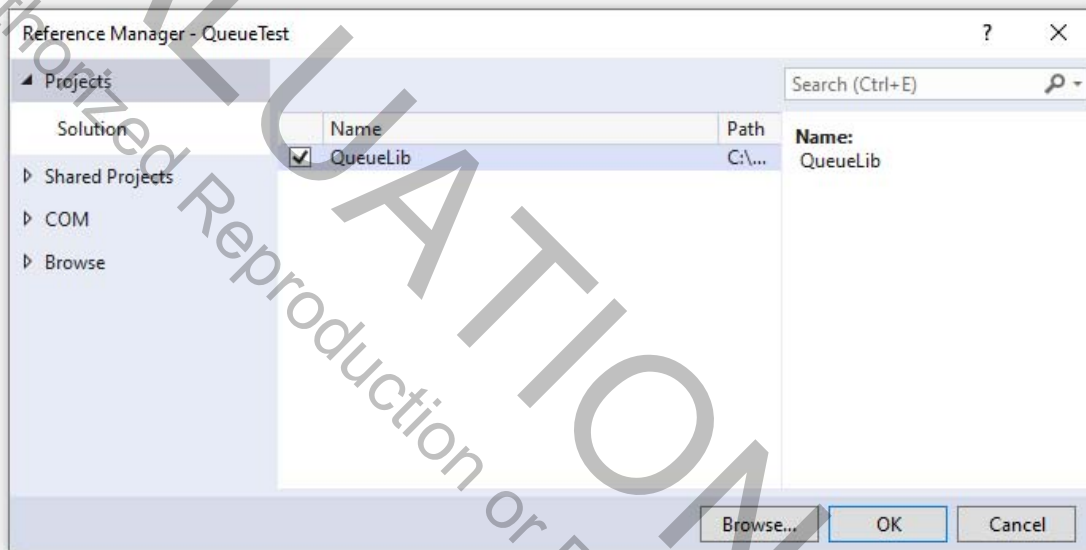


- In **QueueTests.cs** add a **using** statement to import the **QueueLib** namespace.

```
using NUnit.Framework;  
using QueueLib;
```


- Build the solution. Now you should get a clean compile.

Demo: Testing QueueLib (Cont'd)

12. Bring up the Test Explorer window from the menu Test | Test Explorer. The blue icon shows that the test has not been run. (We have docked the Test Explorer window as a tabbed document.)

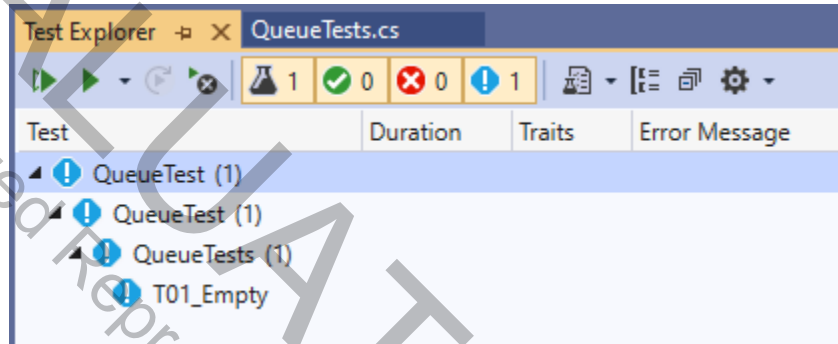

13. Click the Run All toolbar button . The test fails!

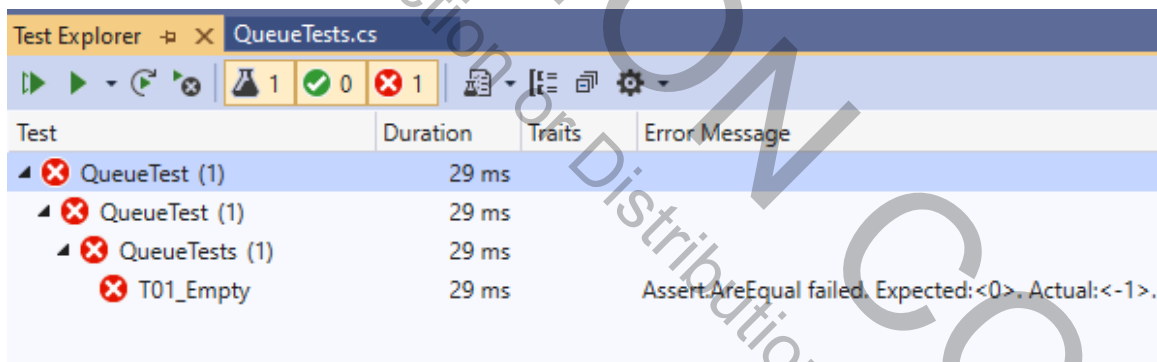


14. The failure was expected, because we only have stub code for the implementation of the Queue.

Demo: Testing QueueLib (Cont'd)

15. Add code to **MyQueue.cs** to implement the **Count** property.

```
public class MyQueue : IQueue
{
    private int count;
    public MyQueue(int size)
    {
        count = 0;
    }
    public int Count
    {
        get
        {
            return count;
        }
    }
    ...
}
```

16. Rebuild the solution and run the test again. Now the test passes, showing green.

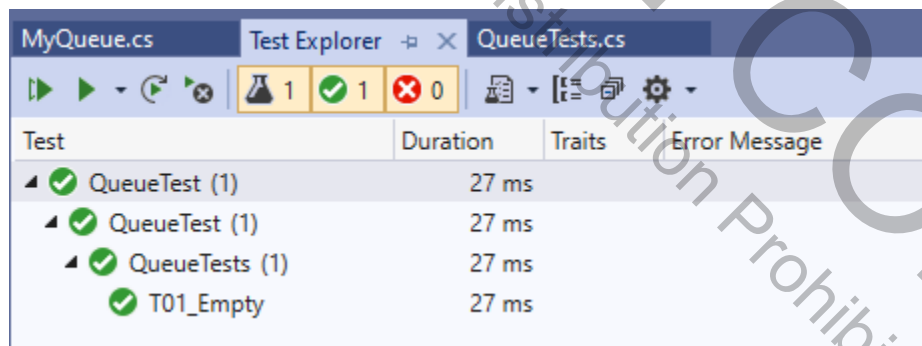


A Second Test

17. Add a second test to **QueueTests.cs**.

```
[TestMethod]
public void T02_EnqueueOne()
{
    MyQueue que = new MyQueue(3);
    que.Enqueue(17);
    Assert.AreEqual(1, que.Count);
}
```

18. Build the solution. Run all the tests. The first test passes (green), but the second test fails.

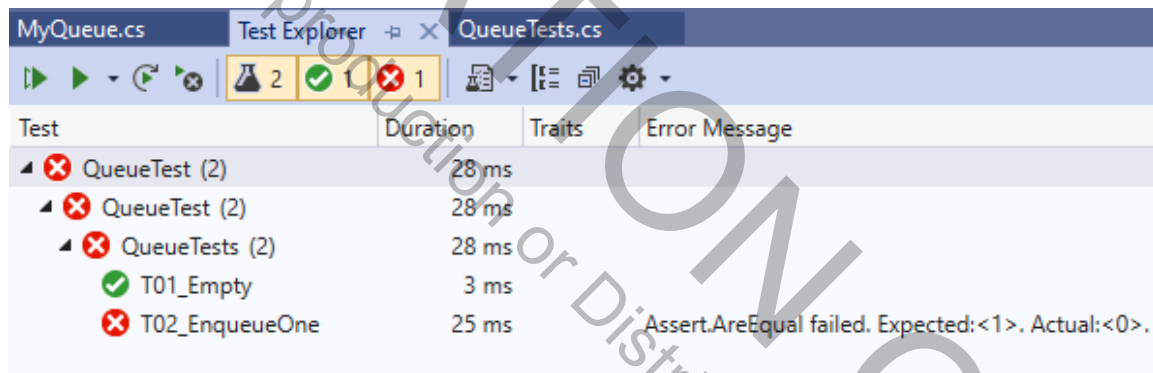



More Queue Functionality


19. Add the following code to your **MyQueue** class.

```
public class MyQueue : IQueue
{
    private int count;
    private int[] data;
    private int front;
    private int rear;
    public MyQueue(int size)
    {
        count = 0;
        data = new int[size];
        front = 0;
        rear = -1;
    }
    public int Count
    {
        get
        {
            return count;
        }
    }
    public void Enqueue(int x)
    {
        rear += 1;
        data[rear] = x;
        count += 1;
    }
    ...
}
```


20. Run the tests again. Now both tests will pass (Step 1).
21. You could continue adding tests and functionality until the Queue is fully implemented and tested. We'll do that later. At this point we just want you to have a general idea of how unit testing in Visual Studio works.

Running Selected Tests

- We have been running all the tests using the toolbar button  in Test Explorer.
- You can run selected tests using the  button.
- For example, select the first three tests in the *MyQueue\NoDequeue* example.

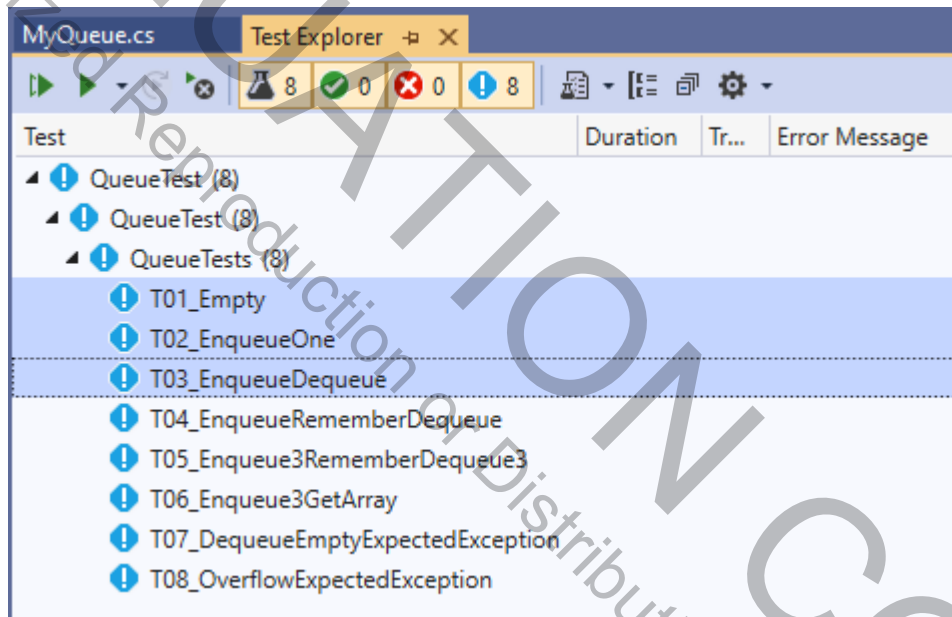

- Click the  button. Here is the result:

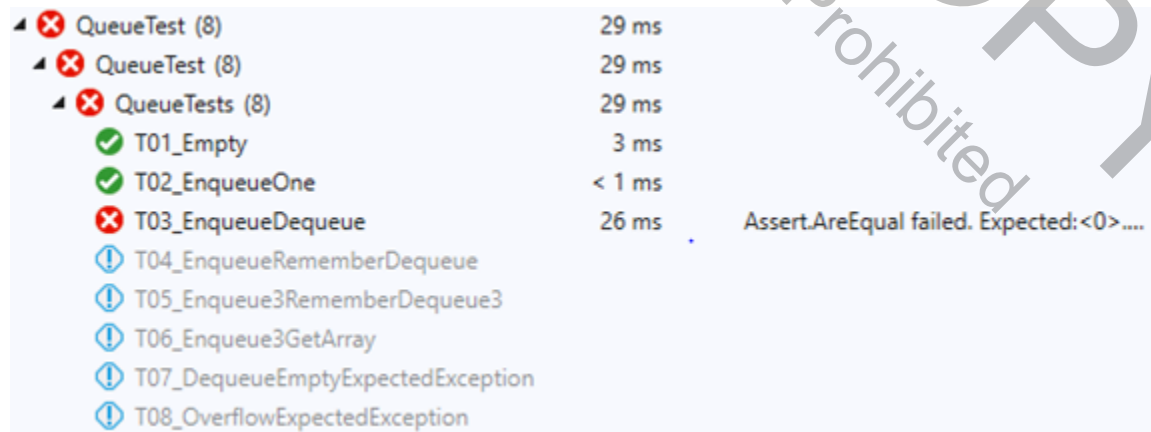

TDD with Legacy Code

- **Our Queue example illustrates test-driven development with a brand new project, with tests developed before the code.**
- **But often, you may have existing legacy code and may wish to start employing TDD going forward.**
 - In this case you have a fully operational system, and you will begin by writing a test suite for the existing system.
 - Then as new features are to be added, you will first add appropriate tests to the test suite.
 - As bugs are discovered, you will also add test cases to the test suite to reproduce the failure.
 - As code is refactored, you will run the entire test suite to ensure that there is no regression.


Acme Travel Agency Case Study

- **The Acme Travel Agency has a simple customer management system to keep track of customers who register for its services.**
- **Customers supply their first and last name and email address. The system supplies a customer ID.**
- **The following features are supported:**
 - Register a customer, returning a customer id.
 - Unregister a customer.
 - Obtain customer information, either for a single customer or for all customers (pass the customer id, and for customer id of -1 return all customers).
 - Change customer's email address.

```
public interface ICustomer
{
    int RegisterCustomer(string firstName,
        string lastName, string emailAddress);
    void UnregisterCustomer(int id);
    Customer[] GetCustomer(int id);
    void ChangeEmailAddress(int id,
        string emailAddress);
}
```

Acme Example Program

- **The Acme Customer Management System comes as a solution with two projects.**
 - See `CaseStudy\Acme\Step0`.
 - The solution contains a class library project **AcmeLib** and a Windows Forms client program **AcmeClient**.

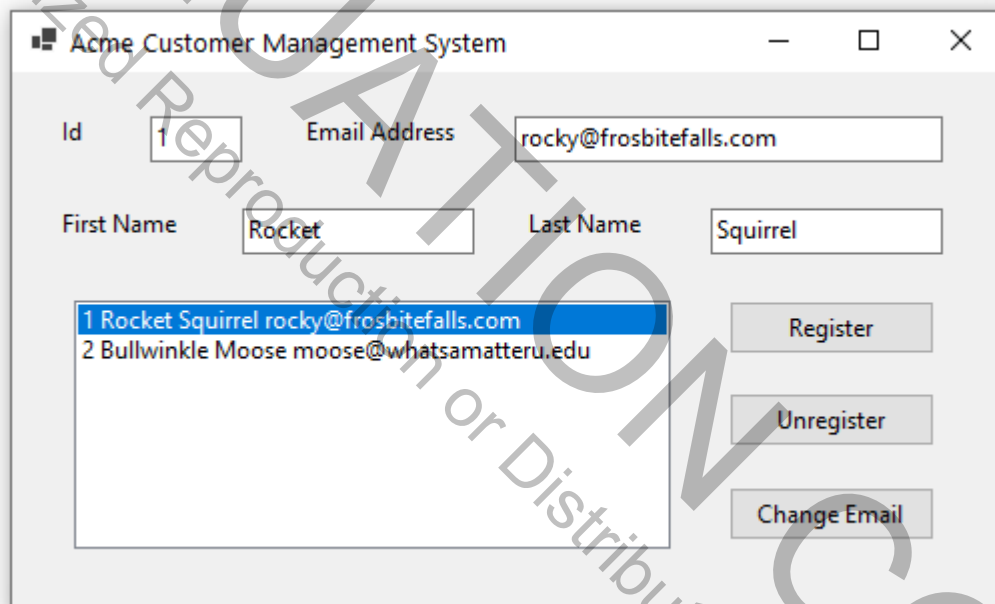

- **To create unit tests, we will add a third project, *AcmeTest*, so as not to perturb the released class library, *AcmeLib*.**
 - See `CaseStudy\Acme\Step1`.

Lab 1

Testing the Customer Class

In this lab, you will begin the Acme Travel Agency case study by implementing simple tests for the **Customer** class. You are provided with starter code that provides implementation of classes **Customer** and **Customers** in a class library. You are also provided with a GUI client program. Your job is to create a third project for testing the **Customer** class with MSTest and to provide simple tests. You will exercise your tests using Visual Studio.

Detailed instructions are contained in the Lab 1 write-up at the end of the chapter.

Suggested time: 45 minutes

Summary

- ***Test-driven development (TDD)*** calls for writing test cases *before* functional code.
- **The test cases embody the requirements that the code must satisfy.**
- **There are two main types of tests pertaining to TDD:**
 - Functional tests, also known as customer tests
 - Unit tests, also known as programmer tests
- **Test automation is essential in TDD** because many tests have to be frequently run.
- **Simple design dictates that your program should both do *no less* and *no more* than the requirements demand.**
- **Refactoring provides continuous improvements in a software system, and automated tests ensure that no regression occurs.**
- **The MSTest Framework in Visual Studio 2019 simplifies writing and running tests in a .NET environment.**
- **TDD can drive a new project from start to finish, and it can also be used with legacy projects.**

Lab 1

Testing the Customer Class

Introduction

In this lab, you will begin the Acme Travel Agency case study by implementing simple tests for the **Customer** class. You are provided with starter code that provides implementation of classes **Customer** and **Customers** in a class library. You are also provided with a GUI client program. Your job is to create a third project for testing the **Customer** class with MSTest and to provide simple tests. You will exercise your tests using Visual Studio's Test Explorer.

Suggested Time: 45 minutes

Root Directory: OIC\UnitCs


Directories: Labs\Lab1 (Do your work here)
CaseStudy\Acme\Step0 (Backup of starter files)
CaseStudy\Acme\Step1 (Answer)


Instructions

1. Build the starter solution. This will build a class library **AcmeLib.dll** and a client Windows program **AcmeClient.exe**.
2. Exercise the client program by registering and unregistering a few customers, and changing the email addresses of some customers. Note that the ID of a new customer is automatically generated.
3. Examine the code of the class library project. Make sure you understand both the **Customer** class and the **Customers** class. Note the simple array implementation in this version of **Customers**.
4. Add a new Test Project **AcmeTest** to your solution. You can do this by right-clicking over the solution in Solution Explorer and choosing Add | New Project from the context menu. The project should have template MSTest Test Project (.NET Core).
5. Change the Target Framework to .NET 5.0.
6. Examine the generated file **UnitTest1.cs** in the test project. Change the name of the file to **CustomerTests.cs**, and the name of the class to **CustomerTests**. Also change the supplied test method to **OneCustomer()**. This method should instantiate a customer object and make assertions that the three fields of the new object have the proper data.

```
[TestMethod]
public void OneCustomer()
{
    Customer cust = new Customer("Joe", "Blow", "foo@bar.com");
    Assert.AreEqual("Joe", cust.FirstName);
    Assert.AreEqual("Blow", cust.LastName);
    Assert.AreEqual("foo@bar.com", cust.EmailAddress);
}
```

7. Build the solution. The build fails, because the test project cannot find the Customer class.
8. In the **AcmeTest** project, add a project references to **AcmeLib** project. Now the build should be successful.
9. You should see the test show up in Test Explorer with blue icon showing it has not run.

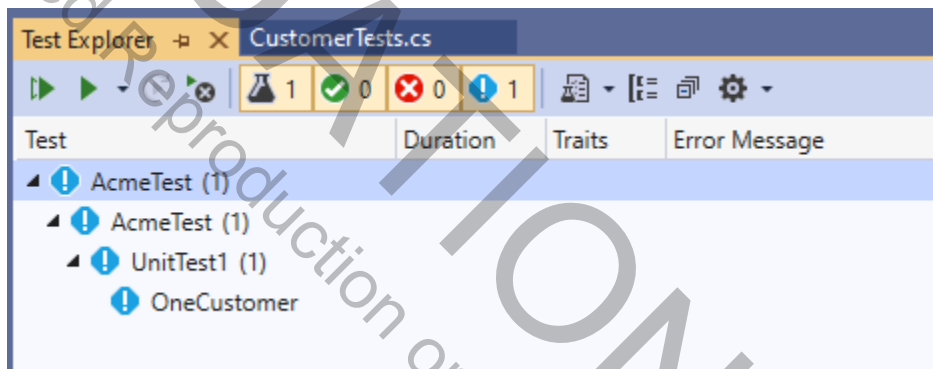

10. Click Run All Tests toolbar button . The test should succeed!
11. Examine the documentation of the **Assert** class (you can click F1 over **Assert**) in **CustomerTests.cs**), and notice the overload of the static **AreEqual()** method that provides for a message.

AreEqual(Object, Object, String)

Tests whether the specified objects are equal and throws an exception if the two objects are not equal. treated as unequal even if the logical values are equal. 42L is not equal to 42.


```
C#
public static void AreEqual (object expected, object actual, string message);
```

12. . Provide a second test method **OneCustomerMessage()** that performs the same test as the first test method but in addition displays a designated error message, which you


can use to specify which field failed. In the assertion for the first name, test against the first name with all upper case characters.

```
[TestMethod]
public void OneCustomerMessage()
{
    Customer cust = new Customer("Joe", "Blow", "foo@bar.com");
    Assert.AreEqual("JOE", cust.FirstName, "FirstName not equal");
    Assert.AreEqual("Blow", cust.LastName, "LastName not equal");
    Assert.AreEqual("foo@bar.com", cust.EmailAddress,
        "EmailAddress not equal");
}
```

13. Build the solution. You will now see the second test in Test Explorer.

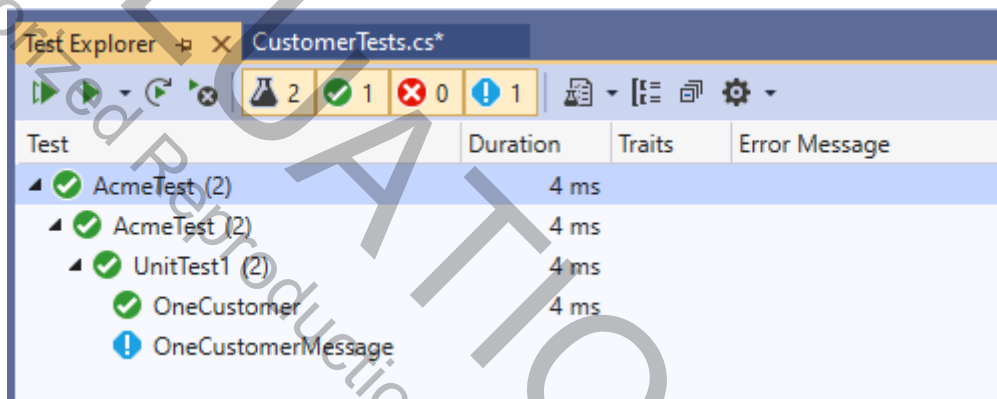

14. You could select Run All Tests again. But it will be more efficient to just run the Not Run Tests, because nothing has changed to make the Passed Test fail this time.

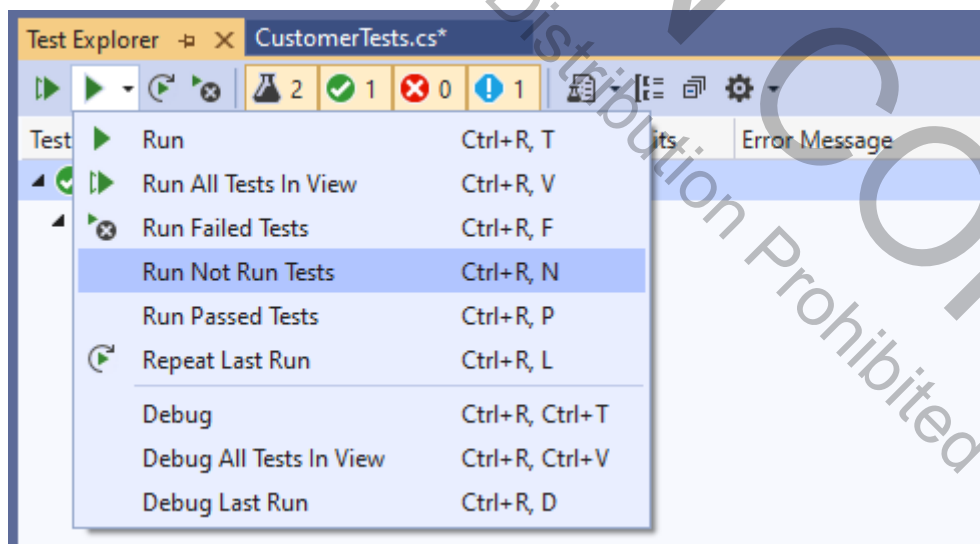

15. The new test fails.

16. Click on the failed test. You will see the error message that you supplied displayed in the Test Detail Summary at the right

Test Detail Summary

❌ OneCustomerMessage

📄 Source: [CustomerTests.cs](#) line 17

🕒 Duration: 24 ms

Message:

Assert.AreEqual failed. Expected:<JOE>. Actual:<Joe>. FirstName not equal

Stack Trace:

[CustomerTests.OneCustomerMessage\(\)](#) line 20

17. Provide a third variation of the one customer test in which you specify that case should be ignored when doing a comparison. Do this by first creating a helper method **AreEqualIgnoreCase()**. Don't worry about supplying an error message.

```
private void AssertEqualIgnoreCase(string first, string second)
{
    Assert.AreEqual(first.ToUpper(), second.ToUpper());
}
```


Then provide the test method.

```
[TestMethod]
public void OneCustomerIgnoreCase()
{
    Customer cust = new Customer("Joe", "Blow", "foo@bar.com");
    AssertEqualIgnoreCase("JOE", cust.FirstName);
    AssertEqualIgnoreCase("Blow", cust.LastName);
    AssertEqualIgnoreCase("foo@bar.com", cust.EmailAddress);
}
```

18. Build the solution and run all the tests. Now two tests should succeed while one test continues to fail.
19. Provide a fourth test that will create two customers and verify that the generated CustomerIds are not equal.

```
[TestMethod]
public void TwoCustomers()
{
    Customer cust1 = new Customer("Joe", "Blow", "foo@bar.com");
    Customer cust2 = new Customer("Amy", "Smith", "amy@foo.com");
    Assert.AreNotEqual(cust1.CustomerId, cust2.CustomerId);
}
```

20. Run all the tests. All tests should pass except one.

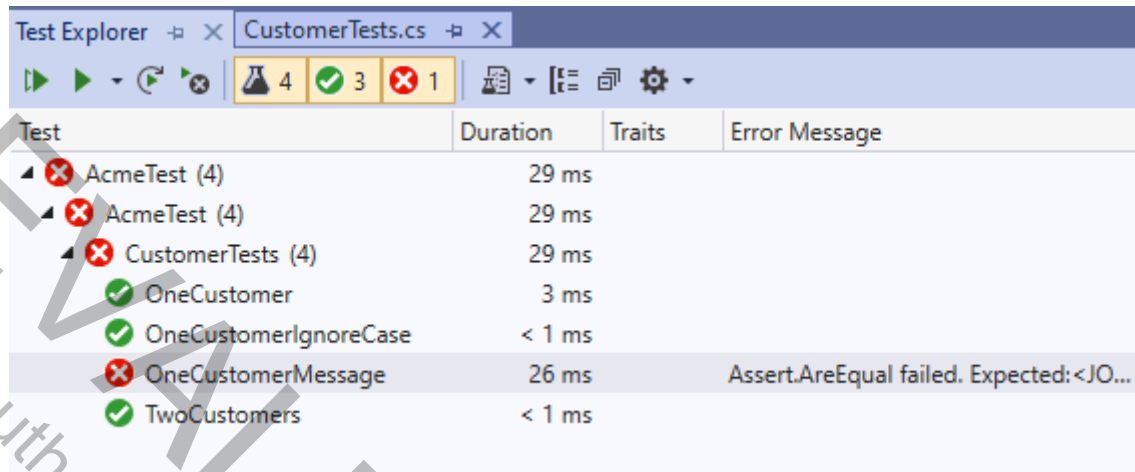

Test	Duration	Traits	Error Message
AcmeTest (4)	29 ms		
AcmeTest (4)	29 ms		
CustomerTests (4)	29 ms		
OneCustomer	3 ms		
OneCustomerIgnoreCase	< 1 ms		
OneCustomerMessage	26 ms		Assert.AreEqual failed. Expected:<JO...
TwoCustomers	< 1 ms		

21. We added the extra methods `OneCustomerIgnoreCase` and `OneCustomerMessage` as tests for demo purposes. Delete them. You are now at Step 1. (The example with the extra test methods is saved in **Step1extra**.)
22. If you have time, provide some tests for the **Customers** class.

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited



7400 E. Orchard Road, Suite 1450 N
Greenwood Village, Colorado 80111
Ph: 303-302-5280
www.ITCourseware.com