


it courseware™

TRAINING MATERIALS FOR IT PROFESSIONALS

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

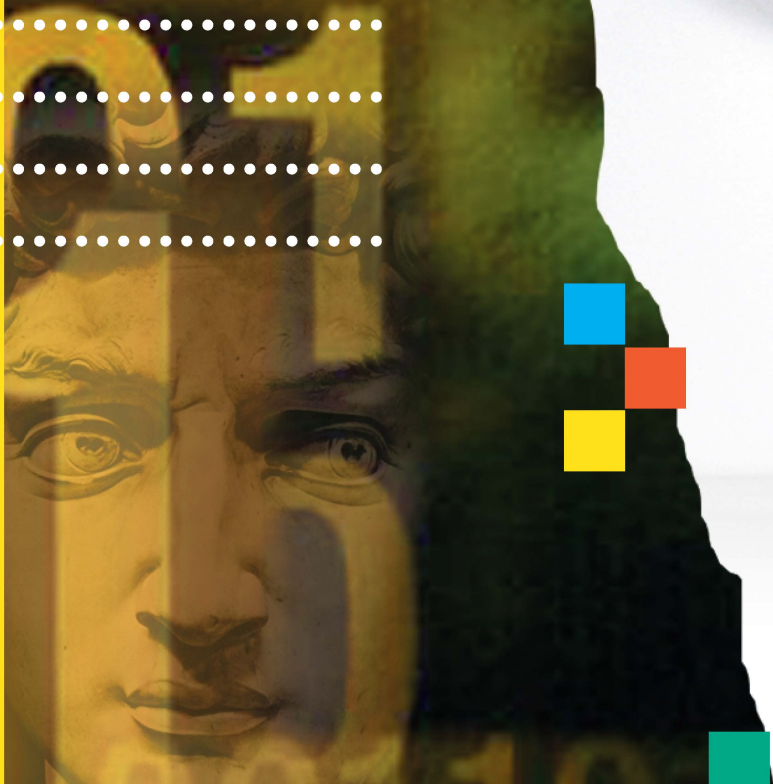

C# and .NET Foundations

Student Guide

Revision 6.0

C# and .NET Foundations

Rev. 6.0

Student Guide

Information in this document is subject to change without notice. Companies, names and data used in examples herein are fictitious unless otherwise noted. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Object Innovations.

Product and company names mentioned herein are the trademarks or registered trademarks of their respective owners.



™ is a trademark of Object Innovations.

Author: Robert J. Oberg

Special Thanks: Johnathon McAlister

Copyright ©2023 Object Innovations Enterprises, LLC All rights reserved.

Object Innovations
www.objectinnovations.net

Published in the United States of America.

Table of Contents (Overview)

Module 1: C# Essentials

Chapter 1	Introduction to .NET
Chapter 2	C# Overview for the Sophisticated Programmer
Chapter 3	Object-Oriented Programming in C#
Chapter 4	C# and .NET
Chapter 5	Delegates and Events
Chapter 6	Introduction to Windows Forms
Chapter 7	Newer Features in C#
Appendix A	Using Visual Studio 2022
Appendix B	Language Integrated Query (LINQ)
Appendix C	Unsafe Code and Pointers in C#

Module 2: .NET Foundations

Chapter 1	.NET Fundamentals
Chapter 2	Class Libraries
Chapter 3	Frameworks and Packages
Chapter 4	Metadata and Reflection
Chapter 5	I/O and Serialization
Chapter 6	.NET Programming Model
Chapter 7	.NET Threading
Appendix D	Learning Resources

Module 1 Directory Structure

- **Module 1 software installs to the root directory**
C:\OIC\CsEss.
 - Example programs for each chapter are in named subdirectories of chapter directories **Chap01**, **Chap02**, and so on.
 - Example programs for Appendices A, B and C are in the directories **AppA**, **AppB** and **AppC**.
 - The **Labs** directory contains one subdirectory for each lab, named after the lab number. Starter code is frequently supplied, and answers are provided in the chapter directories.
 - The **CaseStudy** directory contains a case study in multiple steps.
 - The **Demos** directory is provided for performing in-class demonstrations led by the instructor.

Module 2 Directory Structure

- **Module 2 software installs to the root directory**
C:\OIC\NetCs.
 - Example programs for each chapter are in named subdirectories of chapter directories **Chap01**, **Chap02**, and so on.
 - The **Labs** directory contains one subdirectory for each lab, named after the lab number. Starter code is frequently supplied, and answers are provided in the chapter directories.
 - The **Demos** directory is provided for hand-on work during lectures.
 - The **Packages** directory is for custom packages.
 - The **Run** directory is for .NET Core executables to be launched programmatically as a process.
 - The file **Links.doc** contains link to web sites and pages mentioned in the text along with other useful links.

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Module 1

Table of Contents (Detailed)

Chapter 1 Introduction to .NET	1
What is .NET?.....	3
Libraries and Tools	4
Application Models.....	5
Managed Code	6
.NET Programming in a Nutshell	7
Visual Studio 2022.....	8
Visual Studio Demo.....	9
Configure Your New Project.....	11
New Console Template.....	12
Project Properties	14
Using the Visual Studio Text Editor.....	15
IntelliSense.....	16
Build the Project	17
Run the Project.....	18
Visual C# and GUI Programs	19
.NET Documentation	20
Summary	21
Chapter 2 C# Overview for the Sophisticated Programmer.....	23
Hello, World	25
Program Structure	26
Namespaces.....	29
Variables	31
Input in C#	32
More about Classes	33
InputWrapper Class	34
Sample Program.....	35
Input Wrapper Implementation.....	36
Classes and Namespaces.....	37
Control Structures	38
switch	39
C# Operators	40
Precedence Table	41
Types in C#.....	42
Simple Types	43
Types in System Namespace	44
Integer Data Types.....	45
Floating Point Data Types	46

Implicit Conversions.....	47
Explicit Conversions.....	48
Boolean Data Type	49
struct.....	50
Uninitialized Variables	51
Enumeration Types	52
Nullable Types.....	53
Reference Types.....	54
Class Types.....	55
object.....	56
string	57
Copying Strings	58
StringBuilder Class	59
Classes and Structs.....	61
Static and Instance Methods	62
Method Parameters	63
No “Freestanding” Functions in C#.....	64
Classes with All Static Methods	65
Parameter Passing.....	66
Parameter Terminology	67
Value Parameters	68
Reference Parameters.....	69
Reference Parameters Example	70
Output Parameters.....	71
Output Parameters Example	72
Structure Parameters	73
Class Parameters	74
Method Overloading	75
Variable Length Parameter Lists	77
Arrays.....	78
One-Dimensional Arrays	79
System.Array	80
Jagged Arrays.....	81
Rectangular Arrays	82
foreach for Arrays.....	83
Boxing and Unboxing.....	84
Implicitly Typed Variables	85
Implicitly Typed Variables – Example.....	86
Output in C#.....	87
Formatting.....	88
Formatting Example.....	89
Exceptions.....	90
Exception Example	91
Checked Integer Arithmetic.....	92
Throwing New Exceptions	93
finally	94

System.Exception.....	95
Lab 2	96
Summary	97
Chapter 3 Object-Oriented Programming in C#.....	101
C# Object-Oriented Features	103
Encapsulation and Accessors.....	104
Asymmetric Accessor Accessibility	105
Using a Property	106
Indexers.....	107
Visual Studio Console Apps	108
Files in Skeleton Solution	110
Source File.....	111
Adding a Class.....	112
Bank Example.....	116
Account Class	117
Constructors	119
Static Members	120
Static in <i>Main()</i>	121
Static Constructor.....	122
Constant and Readonly Fields	123
Auto-Implemented Properties.....	124
Auto-Implemented Property Example.....	125
Inheritance in C#.....	126
New Version of Base Class.....	127
Features of the New Base Class.....	128
Derived Class	129
Overriding a Virtual Function.....	130
Sample Run.....	131
Abstract Classes	132
Keyword: abstract	133
Derived Class	134
Test Program.....	135
Sealed Classes	136
Access Control and Assemblies.....	137
Internal Accessibility	138
Assembly Example	139
Class Libraries	140
Lab 3	141
Summary	142
Chapter 4 C# and .NET	147
Components and OO in C#.....	149
Interfaces in C#.....	151
Interface Inheritance	152
Programming with Interfaces.....	153
Implementing Interfaces	154

Using an Interface	156
Example: SmallInterface.....	157
Dynamic Use of Interfaces.....	158
Example: TryInterfaces.....	159
is Operator.....	160
as Operator	161
Resolving Ambiguity	162
Explicit Interface Implementation	163
Explicit Interfaces Test Program	164
System.Object.....	165
Collections	167
ArrayList.....	168
ArrayList Methods.....	169
Example: StringList.....	170
IEnumerable and IEnumerator.....	171
Using Enumerators.....	172
Collections of User-Defined Objects.....	173
Account Class	174
AccountList Class.....	176
Copy Semantics in C#.....	178
Deep Copy and ICloneable.....	179
Lab 4A	180
Writing Generic Code.....	181
Using a Class of <i>object</i>	182
Generic Types.....	183
Generic Syntax in C#.....	184
Generic Example.....	185
Generic Client Code.....	186
System.Collections.Generic.....	187
Lab 4B.....	188
Object Initializers.....	189
Collection Initializers.....	190
Anonymous Types	191
Attributes.....	192
Attribute Usage Example.....	193
Summary	194
Chapter 5 Delegates and Events	199
Overview of Delegates and Events.....	201
Callbacks and Delegates	202
Usage of Delegates	203
Declaring a Delegate.....	204
Defining a Method.....	205
Creating a Delegate Object.....	206
Calling a Delegate.....	207
Random Number Generation	208

A Random Array	209
Anonymous Methods	210
Combining Delegate Objects	211
Account.cs	212
DelegateAccount.cs	213
Lambda Expressions	214
Named Method.....	215
Anonymous Method.....	216
Lambda Expression Example	217
Events.....	218
Events in C# and .NET	219
Client Side Event Code.....	221
Chat Room Example	222
Lab 5	223
Summary.....	224
Chapter 6 Introduction to Windows Forms	227
Windows Forms Demo	229
Partial Classes	235
Windows Forms Event Handling.....	236
Add Events for a Control.....	237
Events Documentation	238
Closing a Form.....	239
ListBox Control	240
ListBox Example	241
Lab 6	242
Summary.....	243
Chapter 7 Newer Features in C#	247
<i>dynamic</i> Type.....	249
Runtime Error Example	250
<i>dynamic</i> versus <i>object</i>	251
Behavior of <i>object</i>	252
Behavior of <i>dynamic</i>	253
Named Arguments	254
Optional Arguments.....	255
Book Class	256
Using Optional Arguments	257
Variance in Generic Interfaces.....	258
Covariance Example	259
Variance with IComparer<T>.....	260
Interfaces with Variance Support.....	261
Contravariance Example.....	262
Asynchronous Programs in C# 5	263
Task and Task<TResult>	264
Aysnc Methods	265
Async Example	266

Synchronous Call.....	267
Async Call.....	268
Threading.....	269
New Features in C# 6.....	270
Null-Conditional Operator.....	271
Composite Format String.....	272
Interpolated Strings.....	273
New Features in C# 7.....	274
Tuples.....	275
Nullable Reference Types in C# 8.....	276
Nullable Reference Example Program.....	277
Record Type in C# 9.....	279
Example Program for Record Type.....	280
Top-Level Statements.....	282
Summary.....	283
Appendix A Using Visual Studio 2022.....	285
Visual Studio 2022 Community.....	287
Modifying Visual Studio.....	288
Visual Studio Sign in.....	289
Sign In Advantages.....	290
Visual Studio Start Page.....	291
A Visual Studio Solution.....	292
Toolbars.....	294
Creating a Console App.....	295
Using the Visual Studio Text Editor.....	297
Build and Run the Bytes Project.....	298
Running the Bytes Project.....	299
Executable File Location.....	300
Project Designer.....	301
Project Configurations.....	302
Creating a New Configuration.....	303
Setting Configuration Build Settings.....	304
Debugging.....	305
Breakpoints.....	306
Watch Variables.....	307
Debug Toolbar.....	308
Stepping with the Debugger.....	309
Demo: Stepping with the Debugger.....	310
Call Stack and Call Hierarchy.....	311
Multiple-Project Solution Demo.....	312
Adding a Reference.....	314
Project Dependencies.....	315
Startup Project.....	316
Summary.....	317

Appendix B Language Integrated Query (LINQ)	319
Language-Integrated Query (LINQ).....	321
LINQ Example.....	322
Using IEnumerable<T>	323
Basic LINQ Query Operators	324
Obtaining a Data Source	325
LINQ Query Example.....	326
Filtering.....	327
Ordering.....	328
Aggregation.....	329
Obtaining Lists and Arrays	330
Deferred Execution.....	331
Summary.....	332
Appendix C Unsafe Code and Pointers in C#	333
Unsafe Code.....	335
Unsafe Blocks.....	336
Unsafe Option in Visual Studio	337
Pointers	338
Swapping Via Pointers.....	340
Fixed Memory.....	341
Fixed Memory Illustration	342
Summary.....	344

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Chapter 1

Introduction to .NET

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Introduction to .NET

Objectives

After completing this unit you will be able to:

- **Give a high-level overview of .NET, with a focus on .NET 6.0, the basis of .NET implementation going forward.**
- **Outline the architectural components of .NET.**
- **Describe the essentials of creating and running a program in the .NET environment.**
- **Build and run a simple C# program.**
- **Use Visual Studio 2022 as an effective environment for creating C# programs.**
- **Use the .NET documentation.**

What is .NET?

- **.NET is Microsoft's software platform for building applications for many environments.**
 - Originally proprietary and restricted to Microsoft Windows, .NET is now open source and cross-platform.
- **.NET applications can be built using multiple languages.**
 - C# and Visual Basic are object-oriented languages.
 - F# is a functional language which also supports object-oriented and imperative programming.
- **.NET Framework is the original implementation of .NET, running on Windows.**
- **.NET Core is a package-based implementation that is cross-platform, running on Mac and Linux besides Windows.**
- **.NET 6 is the successor of .NET Core.**
 - It is the basis of .NET implementation going forward.
- **.NET Framework 4.8 is the latest version of the classical .NET Framework.**
 - It will continue to be distributed with future releases of Windows. As long as it is installed on a supported version of Windows, .NET Framework 4.8 will continue to also be supported.

Libraries and Tools

- **Microsoft and third parties provide many libraries to extend .NET.**
 - Many libraries are furnished through NuGet packages.
 - NuGet is a package manager specifically designed for .NET.
- **Microsoft and third parties provide many libraries to extend .NET.**
- **Visual Studio is a full-featured IDE running on Windows for building all types of .NET applications.**
 - Visual Studio 2022 is required for .NET 6.
- **Visual Studio for Mac runs on Mac computers.**
 - It can be used for building iOS and macOS.
 - It can also be used for ASP.NET Core apps and services.
- **Visual Studio Code is a lightweight code editor available for Windows, macOS and Linux.**
 - It comes with built in support for JavaScript and extensions for many languages, including C#, C++, Java, Python, PHP, and others.

Application Models

- **Web applications and services**

- Classical ASP.NET supports web applications on Windows
- ASP.NET Core is cross-platform, targeting Windows, macOS and Linux

- **Mobile applications**

- Cross-platform targeting iOS, Android and Windows

- **Desktop**

- Windows desktop applications using Windows Forms or Windows Presentation Foundation (WPF).
- Mac desktop applications

- **Microservices -- a design pattern in which apps are composed of small, independent modules.**

- Docker containers combine microservices into single deployable units.

Managed Code

- **.NET apps run *managed code*.**
- **Compilers for .NET languages generate *intermediate language (IL)*.**
- **An IL program does not run directly on hardware but on a virtual machine, called a *runtime*.**
 - The .NET runtime is known as the Common Language Runtime, or CLR.
- **The runtime provides various services such as automatic memory management, type safety, and so on.**

.NET Programming in a Nutshell

1. Write your program in a high-level .NET language, such as C#.
 2. Compile your program into IL.
 3. Run your IL program, which will launch the runtime (CLR) to execute your IL, using its just-in-time compiler to translate your program to native code as it executes.
- **We will look at a simple example of a C# program, and run it under .NET.**

– See `Chap01\SimpleCalc\Old`.

– Here is the main code:

```
static void Main(string[] args)
{
    int width = 20;
    int height = 5;
    int area;
    area = width * height;
    Console.WriteLine("width = {0}", width);
    Console.WriteLine("height = {0}", height);
    Console.WriteLine("area = {0}", area);
}
```

– Here is the output when the program is run:

```
width = 20
height = 5
area = 100
```

Visual Studio 2022


- **While it is possible to write C# programs using any text editor, and compile them with the command-line compiler, it is very tedious to program that way.**
- **An IDE makes the process of writing software much easier.**
 - An IDE provides convenience items, such as a syntax-highlighting editor.
 - An IDE reduces the tedium of keeping track of configurations, environment settings and file organizations.
- **You may use Visual Studio 2022 throughout this course to create and compile your C# programs.**
- **Visual Studio 2022 is discussed in more detail in Appendix A.**
- **In this course you may use any version of VS 2022, including the free Visual Studio 2022 Community.**

Visual Studio Demo

- **We will now create a simple console application using Visual Studio.**


- Our program is the simple calculator whose code we showed earlier.

1. From the Visual Studio start page click on "Create a new project". This will bring up the New Project dialog. (You can also use the menu File | New | Project when the main Visual Studio window is open.)

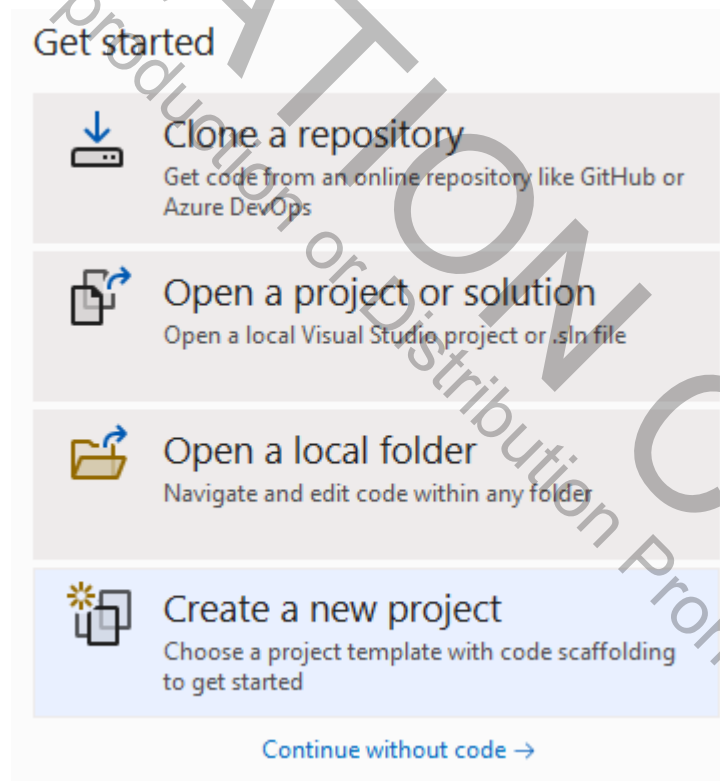

Creating a Console App (Cont'd)

2. Choose Console App with language C#.

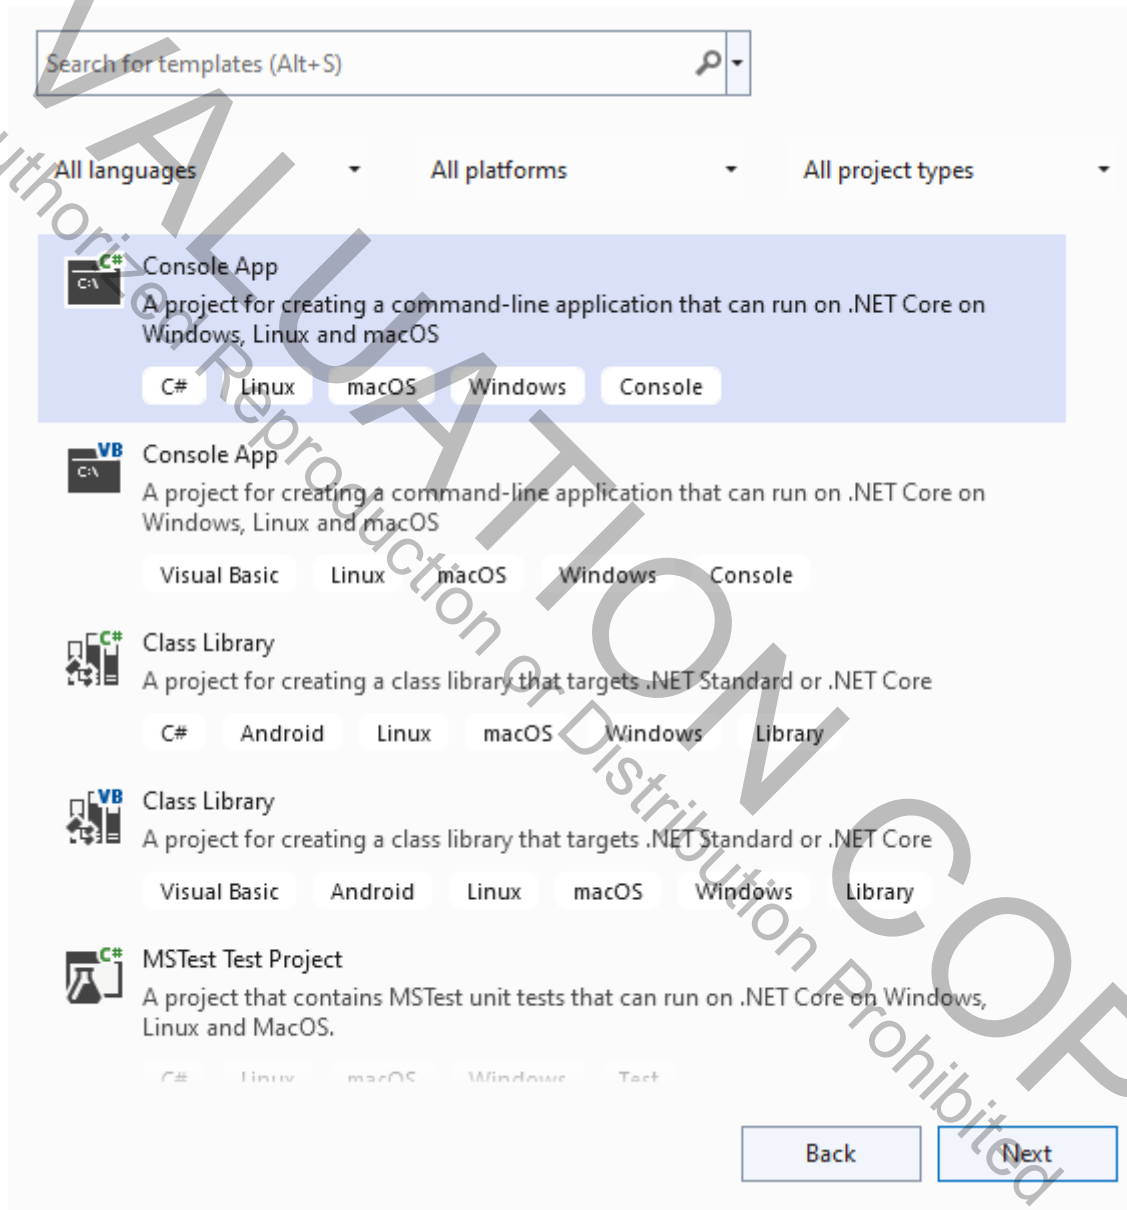

3. Click Next.

Configure Your New Project

4. In the Project name field, type **SimpleCalc** and for Location browse to **C:\OIC\CsEss\Demos**. Leave Solution name as SimpleCalc. Leave unchecked "Place solution and project in the same directory."

Configure your new project

Console App C# Linux macOS Windows Console

Project name

Location

 ...

Solution name ⓘ

Place solution and project in the same directory

5. Click Next. Under “Additional Information” accept the suggested .NET 6.0 (Long-term support) for Framework.

Additional information

Console App C# Linux macOS Windows Console

Framework ⓘ

New Console Template

6. Look at the **Program.cs** file that is created. If you are familiar with .NET from earlier versions, you are in for a big surprise!

// See <https://aka.ms/new-console-template> for more information
Console.WriteLine("Hello, World!");


You can follow the link for more information about the new template. Essentially, the new template uses new features in C# that allow the compile to automatically generate a lot of boiler plate code.

However for most of this course we will not use these newest features, instead focus first on the fundamentals. Then, with a proper foundation, we will explain the new features. Stay tuned!

7. In the meantime, let's finish the demo using the new template. Just replace the supplied **Console.WriteLine()** statement with the code for computing the area of a hard-coded rectangle:

```
int width = 20;
int height = 5;
int area;
area = width * height;
Console.WriteLine("width = {0}", width);
Console.WriteLine("height = {0}", height);
Console.WriteLine("area = {0}", area);
```

8. Build and run without debugging (Ctrl + F5)

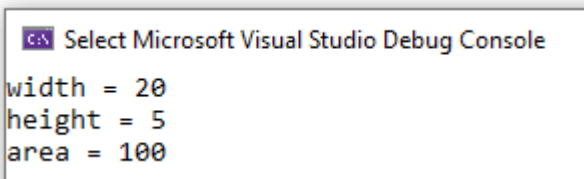


```
Select Microsoft Visual Studio Debug Console
width = 20
height = 5
area = 100
```

9. Program is saved in **Chap01\Simple\Calc\New**.


Old Console Template

- **Open up the solution in *Chap01\SimpleCalc\Old*.**
 - The solution file is **SimpleCalc.sln**.
 - This project was created in Visual Studio 2019 and updated to .NET 6.0
- **Examine the solution in Solution Explorer, containing one project.**

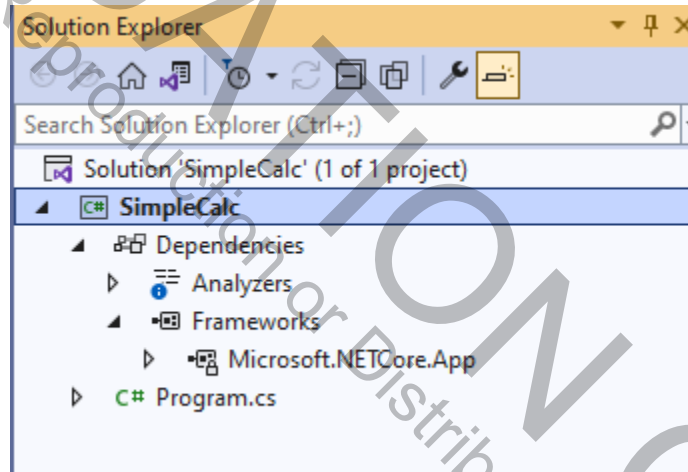

Project Properties

8. Right-click over the SimpleCalc project (shown highlighted in the screen capture) and select Properties. Observe that .NET 6.0 is the Target framework, under the Application | General properties.

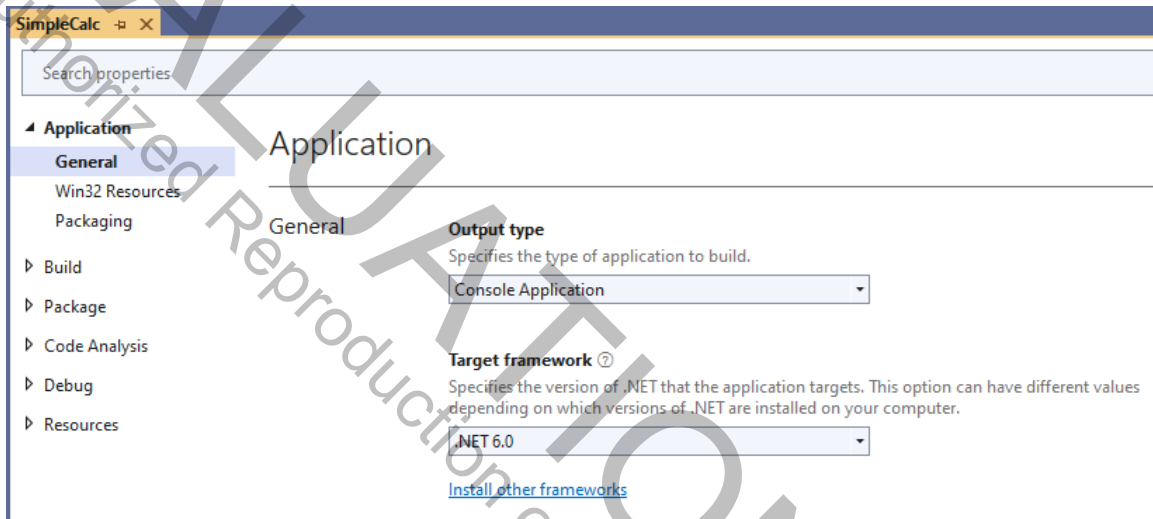

- Don't worry about the other project properties for now.
 - The Properties window is set up to work with the build system and to have convenient default properties.
9. Close the project file. Open the file **Program.cs**, in the Visual Studio editor.

Using the Visual Studio Text Editor

- The file *Program.cs* will be open in the Visual Studio text editor. The starter code for *Main()* has been replaced with the highlighted code shown below:

```
using System;

namespace SimpleCalc
{
    class Program
    {
        static void Main(string[] args)
        {
            int width = 20;
            int height = 5;
            int area;
            area = width * height;
            Console.WriteLine("width = {0}", width);
            Console.WriteLine("height = {0}", height);
            Console.WriteLine("area = {0}", area);
        }
    }
}
```

- All the non-highlighted code is supplied automatically when using the new program template.

IntelliSense

- A powerful feature of Visual Studio is *IntelliSense*.
 - IntelliSense will automatically pop up a list box allowing you to easily insert language elements directly into your code.

```
References
static void Main(string[] args)
{
    int width = 20;
    int height = 5;
    int area;
    area = width * height;
    Console.WriteLine("width = {0}", width);
    Console.WriteLine("height = {0}", height);
    Console.WriteLine("area = {0}", area);
    Console.WriteLine();
}

```


Tab Tab to accept



★ WriteLine	void Console.WriteLine() (+ 17 overloads)
★ MoveBufferArea	Writes the current line terminator to the standard output stream.
BackgroundColor	★ IntelliCode suggestion based on this context
Beep	
BufferHeight	

- Don't actually add another **WriteLine()** statement. This was only a demonstration of IntelliSense.

Build the Project

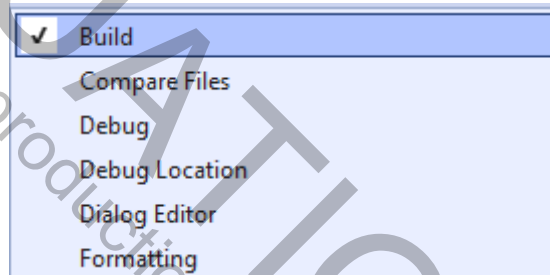- **Building a project means compiling the individual source files and linking them together with any library files to create an IL executable .EXE file.**
- **To make it easier to build, add the Build toolbar (if it is not already present) by a right-click over the toolbar area. Check Build.**




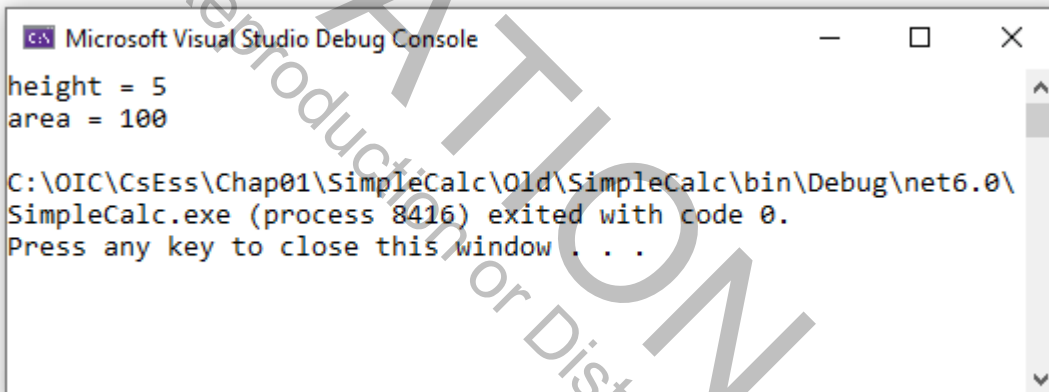
- This will add the Build toolbar to the Standard and Text Editor toolbars that are shown by default.
- **Then you can build the project by using one of the following:**
 - Menu Build | Build Solution or toolbar button  or keyboard shortcut Ctrl+Shift+B. (This builds all the projects in the solution.)
 - Menu Build | Build SimpleCalc or toolbar button . (This just builds the project SimpleCalc)¹.
- **Both forms of Start (see next page) will automatically build the project if not already built.**

¹ The two are the same in this case, because the solution has only one project, but some solutions have multiple projects, and then there is a difference.

Run the Project

- **You can run the program without the debugger by using one of the following:**


- Menu Debug | Start Without Debugging
- Toolbar button  (This button is provided by default in Visual Studio 2022.)
- Keyboard shortcut Ctrl + F5



```
Microsoft Visual Studio Debug Console
height = 5
area = 100

C:\OIC\CsEss\Chap01\SimpleCalc\Old\SimpleCalc\bin\Debug\net6.0\
SimpleCalc.exe (process 8416) exited with code 0.
Press any key to close this window . . .
```

- **You can run the program in the debugger by using one of the following:**


- Menu Debug | Start Debugging
- Toolbar button 
- Keyboard shortcut F5.

- **We will discuss debugging later.**

Visual C# and GUI Programs

- Microsoft's implementation of the C# language, **Visual C#**, works very effectively in a **GUI environment**.
 - Using Windows Forms (available in .NET Core with .NET 5.0 and above), it is easy to create Windows GUI programs in C#.

Example: See **Chap01\SimpleCalcGui**

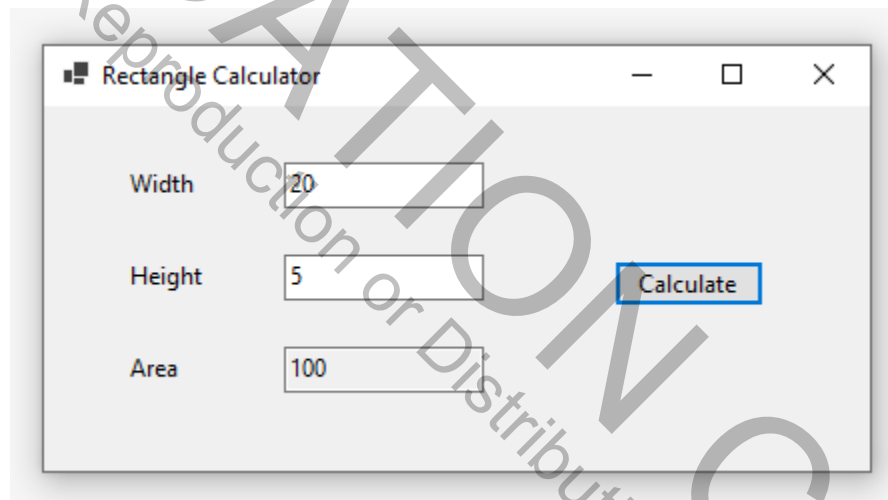

- We will discuss **GUI programming using C#** in **Chapter 6**.

.NET Documentation

- **.NET documentation is available online.**
- **It is now part of comprehensive Microsoft documentation at**

<https://docs.microsoft.com>

- Select .NET.

Thank you for downloading Vis X .NET documentation | Microsoft X









https://docs.microsoft.com/en-us/dotnet/

Microsoft | Docs Documentation Learn Q&A Code Samples More v Search Sign in

.NET Languages v Workloads v APIs v Resources v Download .NET

.NET documentation

Learn to use .NET to create applications on any platform using C#, F#, and Visual Basic. Browse API reference, sample code, tutorials, and more.

 DOWNLOAD Download .NET	 LEARN Build .NET apps with C#
 TUTORIAL Create your first console app	 LEARN Create your first web app
 LEARN Browse .NET learning paths	 GET STARTED Interactive introduction to C#
 WHAT'S NEW What's new in .NET docs	 OVERVIEW Azure for .NET developers

Summary

- **.NET is Microsoft's software platform for building applications for many environments.**
- **.NET applications can be built using multiple languages, including C#.**
 - C# is an object-oriented language designed by Microsoft for .NET.
- **The basis of .NET going forward is .NET 6.0, the most recent version of the cross-platform .NET Core.**
- **The classical .NET Framework 4.8 is being maintained.**
- **Visual Studio is a full-featured IDE running on Windows for building all types of .NET applications.**
- **With Visual Studio it is easy to create and run programs using C#.**
- **With the new Console Template in Visual Studio 2022 and new features in C#, a lot of boiler plate code is supplied automatically by the compiler.**
- **Windows Forms is supported in .NET 6.0 as an easy means of creating GUI programs.**
- **You can access extensive .NET documentation online.**

EVALUATION COPY
Unauthorized Reproduction or Distribution Prohibited

Chapter 2

C# Overview for the Sophisticated Programmer

C# Overview for the Sophisticated Programmer

Objectives

After completing this unit you will be able to:

- **Create, compile and run C# programs using Visual Studio.**
- **Describe the basic structure of C# programs.**
- **Describe how related C# classes can be grouped into namespaces.**
- **Describe objects and classes in C#.**
- **Perform input and output in C#.**
- **Outline the principle control structures and operators in C#.**
- **Outline the principle data types in C#.**
- **Describe the difference between value and reference types, and explain how C# achieves a unified type system through “boxing” and “unboxing.”**
- **Describe parameter passing in C#.**
- **Use structures, strings and arrays.**
- **Perform formatting in C#.**
- **Use exceptions in C#.**

Hello, World

- **Whenever learning a new programming language, a good first step is to write and run a simple program that will display a single line of text.**
 - Such a program demonstrates the basic structure of the language, including output.
 - You must learn the pragmatics of compiling and running the program.
- **When you create a new C# Console application Visual Studio will create a Hello World program for you!**
 - We have added a comment to the (old template) starter code.

```
// Hello World demo
```

```
using System;
```

```
namespace Hello
```

```
{
```

```
    class Program
```

```
    {
```

```
        static void Main(string[] args)
```

```
        {
```

```
            Console.WriteLine("Hello World!");
```

```
        }
```

```
    }
```

```
}
```

- See **Hello** in the **Chap02** directory.

Program Structure

```
...  
class Program  
{  
    ...  
}
```

- **Every C# program has at least one *class*.**
 - A class is the foundation of C#'s support of object-oriented programming.
 - A class encapsulates data (represented by **variables**) and behavior (represented by **methods**).
 - All of the code defining the class (its variables and methods) will be contained between the curly braces.
 - We will discuss classes in detail later.
- **Note the *comment* at the beginning of the program.**
 - A line beginning with a double slash is present only for documentation purposes and is ignored by the compiler.
- **C# files have the extension *.cs*.**

Program Structure (Cont'd)

```
...
class Program
{
    static void Main(string[] args)
    {
        ...
    }
}
...
```

- **There is a distinguished class which has a method whose name must be *Main*.**

- The method should be **static**.
- An **int** exit code can be returned to the operating system.

```
static int Main(string[] args)
```

- Use **void** if you do not return an exit code.
- Command line arguments are passed as an array of strings.
- The argument list can be empty:
- The runtime will call this **Main** method—it is the entry point for the program.
- All of the code for the **Main** method will be between the curly braces.
- Note that in C#, it is not necessary for the file name to be the same as the name of the class containing the **Main** method.

Program Structure (Cont'd)

```
...
class Program
{
    static void Main(string[] args)
    {
        Console.WriteLine("Hello World!");
    }
}
...
```

- **Every method in C# has one or more *statements*.**
- **A statement is terminated by a semicolon.**
 - A statement may be spread out over several lines.
- **The *Console* class provides support for standard output and standard input.**
 - The method **WriteLine()** displays a string, followed by a new line.

Namespaces

- **Much standard functionality in C# is provided through many classes in the .NET Framework.**
- **Related classes are grouped into *namespaces*.**
- **Visual Studio will automatically generate a namespace when a Console program is created.**
 - With the new Console Template the compiler will generate a namespace,

```
using System;
namespace Hello
{
    class Program
    {
        static void Main(string[] args)
        {
            Console.WriteLine("Hello World!");
        }
    }
}
```

- **Note: For simplicity we will typically omit the enclosing namespace in code listings. Thus**

```
using System;

class Program
{
    static void Main(string[] args)
    {
        Console.WriteLine("Hello World!");
    }
}
```

Namespaces (Cont'd)

- **The fully qualified name of a class is specified by the namespace, followed by a dot, followed by class name.**

```
System.Console
```

- **A *using* statement allows a class to be referred to by its class name alone.**

```
using System;
```

```
namespace Hello
{
    class Program
    {
        static void Main(string[] args)
        {
            Console.WriteLine("Hello World!");
        }
    }
}
```

Variables

- In C#, you can define *variables* to hold data.
- Variables represent storage locations in memory.
- In C#, variables are of a specific data *type*.
 - Some common types are **int** for integers and **double** for floating point numbers.
 - You must declare variables before you can use them.
- A variable declaration reserves memory space for the variable and may optionally specify an initial value.

```
int fahr = 86;           // reserves space and assigns
                        // an initial value
int celsius;           // reserves space but does
// not initialize
```

- If an initial value is not specified, C# initializes the variable to a default value, such as 0.

Input in C#

- **A useful program in C# will typically perform some input.**
- **An easy, uniform way to obtain input for various data types is to read the data in as a string and then convert it to the desired data type.**
 - Use **ReadLine()** method of **System.Console** class to read in a string.
 - Use **ToXxxx()** methods of **System.Convert** class to convert the data.

```
Console.WriteLine("How many temperatures? ");  
string buf = Console.ReadLine();  
int numTemp = Convert.ToInt32(buf);
```

- **Because this pattern of prompting for input and reading it is common in our console programs, we provide a simple *InputWrapper* class to shorten our code.**

More about Classes

- **Although we will discuss classes in more detail later, there is a little more you need to know now.**
- **A class can be thought of as a template for creating objects.**
 - An **object** is an instance of a **class**.
- **A class specifies data and behavior.**
 - The data is different for each object instance.
- **In C#, you instantiate a class by using the *new* keyword.**

```
InputWrapper iw = new InputWrapper();
```

- This code creates the object instance **iw** of the **InputWrapper** class.

InputWrapper Class

- **The *InputWrapper* class “wraps” interactive input for several basic data types.**
 - The supported data types are **int**, **double**, **decimal**, and **string**.
 - Methods **getInt**, **getDouble**, **getDecimal**, and **getString** are provided.
 - A prompt string is passed as an input parameter.
 - See the file **InputWrapper.cs** in directory **TestInputWrapper**, which implements the class, and **Program.cs**, which tests the class.
- **You do not need to be familiar with the implementation of *InputWrapper* in order to use it.**
 - That is the beauty of “encapsulation”—complex functionality can be hidden by an easy-to-use interface.

Sample Program

- **This program will convert from Fahrenheit to Celsius.**

– See **ConvertTemp**:

```
using System;

class Main
{
    static void Main(string[] args)
    {
        // Input is done directly
        Console.WriteLine("Temperature in Fahrenheit: ");
        string buf = Console.ReadLine();
        int fahr = Convert.ToInt32(buf);

        int celsius = (fahr - 32) * 5 / 9;
        Console.WriteLine("fahrenheit = {0}", fahr);
        Console.WriteLine("celsius = {0}", celsius);

        // Use the InputWrapper class
        InputWrapper iw = new InputWrapper();
        fahr = iw.getInt(
            "Temperature in Fahrenheit: ");

        celsius = (fahr - 32) * 5 / 9;
        Console.WriteLine("fahrenheit = {0}", fahr);
        Console.WriteLine("celsius = {0}", celsius);
    }
}
```


Input Wrapper Implementation

```
// InputWrapper.cs
//
// Class to wrap simple stream input
// Datatypes supported:
//     int
//     double
//     decimal
//     string
using System;

class InputWrapper
{
    public int getInt(string prompt)
    {
        Console.Write(prompt);
        string buf = Console.ReadLine();
        return Convert.ToInt32(buf);
    }
    public double getDouble(string prompt)
    {
        Console.Write(prompt);
        string buf = Console.ReadLine();
        return Convert.ToDouble(buf);
    }
    public decimal getDecimal(string prompt)
    {
        Console.Write(prompt);
        string buf = Console.ReadLine();
        return Convert.ToDecimal(buf);
    }
    public string getString(string prompt)
    {
        Console.Write(prompt);
        string buf = Console.ReadLine();
        return buf;
    }
}
```

Classes and Namespaces

- In Visual Studio you can add a new class to your project from the project menu.

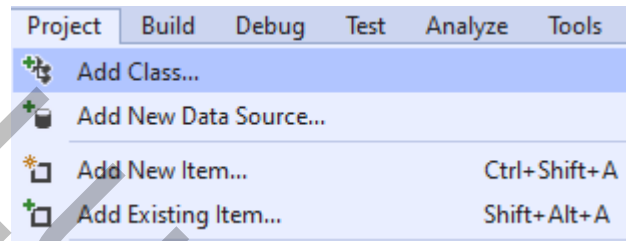

- This will create the new class within the namespace of the project.

```
using System;
using System.Collections.Generic;
using System.Text;
```

```
namespace ConvertTemp
{
    class InputWrapper
    {
    }
}
```

- In the case of a utility class like *InputWrapper* that is intended to be used in many different programs, tying it to the namespace of a particular project is not convenient!
- For simplicity, our *InputWrapper* class is not in any namespace at all!

Control Structures

- **C# has the familiar control structures of the C family of languages:**
 - if
 - while
 - do
 - for
 - switch
 - break
 - continue
 - return
 - goto
- **Except for *switch*, which is less error-prone in C#, these controls all have standard semantics.**
- **There is also a *foreach* statement, which we will discuss later in connection with arrays and collections.**
- **The *throw* statement is used with exceptions.**
- **The *lock* statement can be used to enforce synchronization in multi-threading situations.**

switch

- **In C#, after a particular case statement is executed, control does not automatically continue to the next statement.**
 - You must explicitly specify the next statement, typically with a **break** or **goto label**.

```
switch (code)
{
    case 1:
        goto case 2;
    case 2:
        Console.WriteLine("Low");
        break;
    case 3:
        Console.WriteLine("Medium");
        break;
    case 4:
        Console.WriteLine("High");
        break;
    default:
        Console.WriteLine("Special case");
        break;
}
```

- **You may also switch on a *string* data type.**

C# Operators

- **The C# operators are similar to those in C and C++, with similar precedence and associativity rules.**
- **There are three kinds of operators.**
 - **Unary** operators take one operand and use prefix notation (e.g. `- a`) or postfix notation (e.g. `a++`).
 - **Binary** operators take two operands and use infix notation (e.g. `a + b`).
 - The one **ternary** operator `?:` takes three operands and uses infix notation (e.g. `expr ? x : y`).
- **Operators are applied in the precedence order shown on the next page.**
- **For operators of the same precedence, order is determined by associativity.**
 - The assignment operator is right-associative (operations are performed from right to left).
 - All other binary operators are left-associative (operations are performed from left to right).
- **Precedence and associativity can be controlled by parentheses. The parentheses indicate which operation is performed first, shown as the primary operator (x) in the precedence table.**
- **C# has operators *checked* and *unchecked*, which will be discussed later.**

Precedence Table

- Precedence goes from the top (highest) to bottom (lowest).

Category	Operators
Primary	(x) x.y f(x) a[x] x++ x-- new typeof sizeof checked unchecked
Unary	+ - ! ~ ++x --x (T)x
Multiplicative	* / %
Additive	+ -
Shift	<< >>
Relational	< > <= >= is
Equality	== !=
Logical AND	&
Logical XOR	^
Logical OR	
Conditional	&&
Conditional OR	
Conditional	?:
Assignment	= *= /= += -= <<= >>= &= ^= =

Types in C#

- **There are three kinds of types:**
 - Value types
 - Reference types
 - Pointer types
- **Value types directly contain their data.**
 - Each variable of a value type has its own copy of the data.
 - Value types are typically allocated on the stack and get automatically destroyed when the variable goes out of scope.
- **Reference types do not contain data directly, but only refer to data.**
 - Variables of reference types store *references* to data, called *objects*.
 - Two different variables can reference the same data.
 - Reference types are typically allocated on the heap and eventually get destroyed through a process known as *garbage collection*.
- **Pointer types are only used in *unsafe* code.**
 - Appendix C discusses pointers and unsafe code.

Simple Types

- **The simple data types are general-purpose, value data types, including numeric, character, and boolean.**
 - The **sbyte** data type is an 8-bit signed integer.
 - The **byte** data type is an 8-bit unsigned integer.
 - The **short** data type is a 16-bit signed integer.
 - The **ushort** 16-bit unsigned integer.
 - The **int** data type is a 32-bit signed integer.
 - The **uint** 32-bit unsigned integer.
 - The **long** data type is a 64-bit signed integer.
 - The **ulong** 64-bit unsigned integer.
 - The **char** data type is a Unicode character (16 bits).
 - The **float** data type is a single-precision floating point.
 - The **double** data type is a double-precision floating point.
 - The **bool** data type is a Boolean (**true** or **false**).
 - The **decimal** data type is a decimal type with 28 significant digits (typically used for financial purposes).

Types in System Namespace

- **There is an exact correspondence between the simple C# types and types in the *System* namespace.**
 - C# reserved words are simply aliases for the corresponding type in the **System** namespace.

C# Reserved Word	Type in System Namespace
sybte	System.SByte
byte	System.Byte
short	System.Int16
ushort	System.UInt16
int	System.Int32
uint	System.UInt32
long	System.Int64
ulong	System.UInt64
char	System.Char
float	System.Single
double	System.Double
bool	System.Boolean
decimal	System.Decimal

Integer Data Types

- **C# defines the following 9 integral data types:**
 - The **sbyte** type is a signed 8-bit integer with the range of –128 to 127, inclusive.
 - The **short** type is a signed 16-bit integer with the range of –32768 to 32767, inclusive.
 - The **int** type is a signed 32-bit integer with the range of –2147483648 to 2147483647, inclusive.
 - The **long** type is a signed 64-bit integer with the range of –9223372036854775808 to 9223372036854775807, inclusive.
 - The **byte** type is an unsigned 8-bit integer with the range of 0 to 255, inclusive.
 - The **ushort** type is an unsigned 16-bit integer with the range of 0 to 65535, inclusive.
 - The **uint** type is an unsigned 32-bit integer with the range of 0 to 4294967295, inclusive.
 - The **ulong** type is an unsigned 64-bit integer with the range of 0 to 18446744073709551615, inclusive.
 - The **char** type is an unsigned 16-bit integer with the range of 0 to 65535, inclusive. This set of values represents the Unicode character set.

Floating Point Data Types

- **C# supports the following pre-defined floating point data types.**
 - The **float** data type is a single-precision floating point.
 - The **double** data type is a double-precision floating point.
- **The float data type is represented in the IEEE 754 32-bit single-precision floating point format.**
- **The double data type is represented in the IEEE 754 64-bit double-precision floating point format.**
- **IEEE 754 define the following special floating point values:**
 - **Positive zero** results from dividing 0.0 by a non-zero positive value.
 - **Negative zero** results from dividing 0.0 by a non-zero negative value.
 - **Positive infinity** results from dividing a non-zero positive value by 0.0.
 - **Negative infinity** results from dividing a non-zero negative value by 0.0.
 - **Not-a-Number** (also known as **NaN**) results from dividing 0.0 by 0.0.

Implicit Conversions

- ***Implicit conversions*** are provided by the compiler automatically where they are required.
- **Implicit conversions are guaranteed to be safe, in that no loss of information can occur.**
- **For example, the conversions from *int* to *long*, or from *float* to *double*, are implicit conversions, which are inherently safe.**
 - This is because all values that can be represented by an **int** can be precisely represented by a **long**, and all values that can be represented by a **float** can be precisely represented by a **double**.

Explicit Conversions

- ***Explicit conversions*** are performed only where the programmer uses a cast expression explicitly.
- **Explicit conversions are risky, in that loss of information can easily occur.**
- **Special care may need to be taken when explicitly casting an expression.**
 - For example, the conversions from **long** to **int**, or from **double** to **float**, are explicit conversions, which are inherently risky.
 - This is because not all values that can be represented by a **long** can be precisely represented by an **int**, and not all values that can be represented by a **double** can be precisely represented by a **float**.
- **An explicit conversion can also be used to force the compiler to perform the desired type of arithmetic operation (e.g. floating point division).**

```
// Cast one of the integers to double and use
// a double variable for celsius

double dblCel = (fahr - (double) 32) * 5 / 9;
```
- **If an expression attempts to use an unsafe conversion, and the programmer has not provided an explicit cast to perform the conversion, then a compiler error will be generated.**

Boolean Data Type

- **The *bool* data type represents a Boolean value.**
 - Boolean values are also known as logical values and may only be set to the values **true** or **false**.
- **No predefined conversions exist between *bool* and other types.**
- **In C and C++, there are implicit conversions.**
 - An integer value of 0 or pointer value of **null** converts to **false**.
 - A non-zero or non-null value converts to **true**.
- **In C#, you have to explicitly use relational operators.**

```
if (numTemp == 0)
    ...

if (objRef != null)
    ...
```

struct

- **A *struct* is a value type which can group inhomogeneous types together.**

- It can also have constructors and methods, which we will look at later.

```
public struct Hotel
{
    public string city;
    public string name;
    public int rooms;
    public decimal cost;
}
```

- **A *struct* object is created using the *new* operator.**

```
Hotel hotel = new Hotel();
```

- **A *struct* object can also be created without *new*, but then the fields will be unassigned, and the object cannot be used until the fields have been initialized.**

```
Hotel hotel;
hotel.name = "Sheraton";
// Now it is OK to use hotel.name field
hotel.city = "Atlanta";
hotel.rooms = 100;
hotel.cost = 50.00m;
// Now it is OK to use hotel object
```

Uninitialized Variables

- **The C# compiler will detect attempts to use uninitialized variables.**
 - A **struct** object cannot be used until its fields have been assigned.
 - A simple variable must be initialized before it can be used.

```
int x;  
Console.WriteLine("x = " + x);    // error
```

Enumeration Types

- Finally, an *enumeration* type is a distinct value type with named constants.
- An enumeration type is a distinct type with named constants.
- Every enumeration type has an underlying type, which is one of:
 - byte
 - short
 - int
 - long
- An enumeration type is defined through an *enum* declaration.

```
public enum BookingStatus : byte
{
    HotelNotFound,           // 0 implicitly
    RoomsNotAvailable,      // 1 implicitly
    Ok = 5                   // explicit value
}
```

- If the type is not specified, **int** is used.
- By default, the first **enum** member is assigned the value 0, the second member 1, etc.
- Constant values can be explicitly assigned.

Nullable Types

- **Sometimes it is convenient to allow a special null value for a variable, as well as the range of values allowed by the underlying type.**
 - A good example is in databases, where a null value is typically used to represent missing data.
- **You can declare a variable to be nullable by placing a question mark after the data type.**

```
int? number;
```

- This is equivalent to using `System.Nullable`.

```
System.Nullable<int> number;
```

- **You can then test whether the variable has this special null value by using the property *HasValue*.**
- **See the example program *Nullable*.**

```
static void Main()  
{  
    int? number = null;  
    ShowNumber(number);  
    number = 37;  
    ShowNumber(number);  
}  
static void ShowNumber(int? number)  
{  
    if (number.HasValue)  
        Console.WriteLine(number);  
    else  
        Console.WriteLine("UNDEFINED");  
}
```

Reference Types

- **A variable of a reference type does not directly contain its data, but instead provides a *reference* to the data stored elsewhere (on the heap).**
- **In C#, there are the following kinds of reference types:**
 - Class
 - Array
 - Interface
 - Delegate
- **Reference types have a special value, *null*, which indicates the absence of an instance.**

Class Types

- **A class type defines a data structure that has data members, function members, and nested types.**
- **Class types support *inheritance*.**
 - Through inheritance, a derived class can extend or specialize a base class.
 - We will discuss inheritance and other details about classes in the next chapter.

object

- **The *object* class type is the ultimate base type for all types in C#.**
 - Every C# type derives directly or indirectly from **object**.
- **The *object* keyword in C# is an alias for the predefined *System.Object* class.**
- ***System.Object* has methods such as *ToString()*, *Equals()* and *Finalize()*, which we will study later.**

string

- The *string* class encapsulates a Unicode character string.
- The *string* keyword is an alias for the pre-defined *System.String* class.
- The *string* type is a sealed class.
 - A **sealed** class is one that cannot be used as the base class for any other classes.
- The *string* class inherits directly from the root *object* class.
- String literals are defined using double quotes.
- There are useful built-in methods for *string*.
 - For now, note that the **Equals()** method can be used to test for equality of strings.

```
string a = "hello";  
if (a.Equals("hello"))  
    Console.WriteLine("equal");  
else  
    Console.WriteLine("not equal");
```

- There are also overloaded operators:

```
if (a == "hello")  
    ...
```

Copying Strings

- **Recall that C# has value types and reference types.**
 - A value type contains all of its own data.
 - A reference type refers to data stored somewhere else.
- **As a class, *string* is a reference type.**
- **If a reference variable gets copied to another reference variable, both will refer to the same object.**
- **If the object referenced by the second variable is changed, the first variable will also reflect the new value.**

```
string s1 = "hello";  
string s2 = s1;           // s2 also refers to "hello"
```

- **To provide more predictable program behavior, strings in C# are *immutable*.**
 - Once assigned a value, the object a string refers to cannot be changed.
 - What you may think of as changing the value of a string is really giving a new reference.

```
string s = "bat";  
s = s + "man";           // a new object is created and  
                          // s is assigned to refer to this  
                          // new object
```

StringBuilder Class

- **As we have just discussed, instances of the *string* class are immutable.**
 - As a result, when you manipulate instances of **string**, you are frequently obtaining new **string** instances.
 - Depending on your applications, creating all of these instances may be expensive.
 - The .NET library provides a special class, **StringBuilder** (located in the **System.Text** namespace), in which you may directly manipulate the underlying string without creating a new instance.
 - When you are done, you can create a **string** instance out of an instance of **StringBuilder** by using the **ToString()** method.
- **A *StringBuilder* instance has a capacity and a maximum capacity.**
 - These capacities can be specified in a constructor when the instance is created.
 - By default, an empty **StringBuilder** instance starts out with a capacity of 16.
 - As the stored string expands, the capacity will be increased automatically.

StringBuilderDemo

- The program *StringBuilderDemo* provides a simple demonstration of using the *StringBuilder* class.
 - It shows the starting capacity and the capacity after strings are appended. At the end, a **string** is returned.

```
using System;
using System.Text;

class Program
{
    static void Main(string[] args)
    {
        StringBuilder build = new StringBuilder();
        Console.WriteLine("capacity = {0}",
            build.Capacity);
        build.Append(
            "This is the first sentence.\n");
        Console.WriteLine("capacity = {0}",
            build.Capacity);
        build.Append(
            "This is the second sentence.\n");
        Console.WriteLine("capacity = {0}",
            build.Capacity);
        build.Append("This is the last sentence.\n");
        Console.WriteLine("capacity = {0}",
            build.Capacity);
        string str = build.ToString();
        Console.Write(str);
    }
}
```

Classes and Structs

- **While in C++ the concept of *class* and *struct* is very close, there is more of a fundamental difference between them in C#.**
 - In C++, a class has default visibility of private and a struct has default visibility of public, and that is the *only* difference.
- **In C#, the key difference between a class and a struct is that a class is a reference type and a struct is a value type.**
- **A class must be instantiated explicitly, using *new*.**
 - The new instance is created on the heap, and memory is managed by the system through a garbage collection process.
- **A struct instance may simply be declared, or you may use *new*.**
 - For a struct, the new instance is created on the stack, and the instance will be deallocated when it goes out of scope.
- **There are different semantics for assignment, whether done explicitly or via call-by-value mechanism in a method call.**
 - For a class, you will get a second object reference and both object references refer to the same data.
 - For a struct, you will get a completely independent copy of the data in the struct.

Static and Instance Methods

- We have seen that classes can have different kinds of members, including fields, constants, and *methods*.

- A method implements behavior that can be performed by an object or a class.
- Ordinary methods, sometimes called **instance methods**, are invoked through an object instance.

```
Account acc = new Account();  
acc.Deposit(25);
```

- Static methods are invoked through a class and do not depend upon the existence of any instances.

```
int sum = SimpleMath.Add(5, 7);
```

Method Parameters

- **Methods have a list of parameters, which may be empty.**
 - Methods either return a value or have a **void** return.
 - Multiple methods may have the same name, so long as they have different signatures (a feature known as **method overloading**).
 - Methods have the same signature if they have the same number of parameters and these parameters have the same types and modifiers (such as **ref** or **out**).
- **The return type does not contribute to defining the signature of a method. By default, parameters are value parameters, meaning copies are made of the parameters.**
 - The keyword **ref** designates a **reference** parameter, in which case, the parameter inside the method and the corresponding actual argument refer to the same object.
 - The keyword **out** refers to an **output** parameter, which is the same as a reference parameter, except that on the calling side, the parameter need not be assigned prior to the call.

No “Freestanding” Functions in C#

- **In C#, *all* functions are methods and, therefore, associated with a class.**
 - There is no such thing as a freestanding function, as in C and C++.
 - “All functions are methods” is rather similar to “everything is an object” and reflects the fact that C# is a pure object-oriented language.
 - The advantage of all functions being methods is that classes become a natural organizing principle. Methods are nicely grouped together.

Classes with All Static Methods

- Sometimes part of the functionality of your system may not be tied to any data, but may be purely functional in nature.
- In C#, you would organize such functions into classes that have all static methods and no fields.
- The program *TestSimpleMath* provides an elementary example.

```
public class SimpleMath
{
    public static int Add(int x, int y)
    {
        return x + y;
    }
    public static int Multiply(int x, int y)
    {
        return x * y;
    }
}
```

Parameter Passing

- **Programming languages have different mechanisms for passing parameters.**
- **In the C family of languages, the standard is “call-by-value.”**
 - This means that the actual data values themselves are passed to the method.
 - Typically, these values are pushed onto the stack and the called function obtains its own independent copy of the values.
 - Any changes made to these values will not be propagated back to the calling program. C# provides this mechanism of parameter passing as the default, but C# also supports reference parameters and output parameters.
 - In this section, we will examine all three of these mechanisms, and we will look at the ramifications of passing class and struct data types.

Parameter Terminology

- **Storage is allocated on the stack for method parameters.**
 - This storage area is known as the **activation record**.
 - It is popped when the method is no longer active.
 - The **formal parameters** of a method are the parameters as seen within the method.
 - They are provided storage in the activation record.
 - The **arguments** of a method are the expressions between commas in the parameter list of the method call.

```
int sum = SimpleMath.Add(5, 7);
                        // arguments are
                        // 5 and 7
...
public static int Add(int x, int y)
{
    // formal parameters are
    // x and y
    ...
}
```

Value Parameters

- **Parameter passing is the process of initializing the storage of the formal parameters by the actual parameters.**
- **The default method of parameter passing in C# is *call-by-value*, in which the values of the actual parameters are copied into the storage of the formal parameters.**
 - Call-by-value is safe, because the method never directly accesses the actual parameters, only its own local copies.
- **But there are drawbacks to call-by-value:**
 - There is no direct way to modify the value of an argument. You may use the return type of the method, but that only allows you to pass one value back to the calling program.
 - There is overhead in copying a large object.
- **The overhead in copying a large object is borne when you pass a *struct* instance.**
 - If you pass a class instance, or an instance of any other reference type, you are passing only a reference and not the actual data itself.
 - This may sound like call-by-reference, but what you are actually doing is passing a reference by value.
 - Later in this section, we will discuss the ramifications of passing struct and class instances.

Reference Parameters

- **Consider a situation in which you want to pass more than one value back to the calling program.**
- **C# provides a clean solution through *reference parameters*.**
 - You declare a reference parameter with the **ref** keyword, which is placed before both the formal parameter and the actual parameter.
 - A reference parameter does not result in any copying of a value.
 - Instead, the formal parameter and the actual parameter refer to the same storage location.
 - Thus, changing the formal parameter will result in the actual parameter changing, as both are referring to exactly the same storage location.

Reference Parameters Example

- The program *RefOutMath* illustrates using *ref* parameters.

- A single method **Calculate** passes back two values as reference parameters.

```
static void Main(string[] args)
{
    // ref keyword is used in front of the arguments
    // Variables must be initialized before used as
    // ref arguments
    int sum = 0, product = 0;
    Calculate(5, 7, ref sum, ref product);
    Console.WriteLine("sum = {0}", sum);
    Console.WriteLine("product = {0}", product);
    ...

static void Calculate(int x, int y, ref int sum,
ref int prod)
{
    sum = x + y;
    prod = x * y;
}
```

Output Parameters

- **A reference parameter is used for two-way communication between the calling program and the called program, both passing data in and getting data out.**
- **Thus, reference parameters must be initialized before use.**
 - In the previous example, we are only obtaining output, so initializing the variables only to assign new values is rather pointless.
 - C# provides for this case with **output parameters**.
 - Use the keyword **out** wherever you would use the keyword **ref**.
 - Then you do not have to initialize the variable before use.
 - Naturally, you could not use an **out** parameter inside the method; you can only assign it.

Output Parameters Example

- The program *RefOutMath* also illustrates using *out* parameters.
 - A second method **Calculate2** passes back two values as output parameters.

```
static void Main(string[] args)
{
    ...
    // out keyword is used in front of the arguments
    // Variables need not be initialized before used as
    // out arguments
    int sum2, product2;
    Calculate2(15, 7, out sum2, out product2);
    Console.WriteLine("sum = {0}", sum2);
    Console.WriteLine("product = {0}", product2);
    ...

    // You cannot define overloaded methods that differ
    // only on ref and out
    static void Calculate2(int x, int y, out int sum,
out int prod)
    {
        sum = x + y;
        prod = x * y;
    }
}
```

Structure Parameters

- A struct is a value type, so that if you pass a struct as a value parameter, the struct instance in the called method will be an independent copy of the struct in the calling method.
- The program *HotelStruct* illustrates passing an instance of a *Hotel* struct by value.
- The object *hotel* in the *RaisePrice()* method is an independent copy of the object *ritz* in the *Main()* method.
 - This figure shows the values in both structures after the price has been raised for **hotel**.
 - Thus, the change in price does not propagate back to **Main()**.


Main	ritz	Boston
		Ritz
		100
		\$200.00

RaisePrice	hotel	Boston
		Ritz
		100
		\$250.00

- The program **HotelStructRef** has the same struct definition, but the test program passes the **Hotel** instance by reference.
- Now the change does propagate, as you would expect.

Class Parameters

- A class is a reference type, so that if you pass a class instance as a value parameter, the class instance in the called method will refer to the same object as the reference in the calling method.
- The program *HotelClass* illustrates passing an instance of a *Hotel* class by value.
 - This figure illustrates how the **hotel** reference in the **RaisePrice()** method refers to the same object as the **ritz** reference in **Main()**.

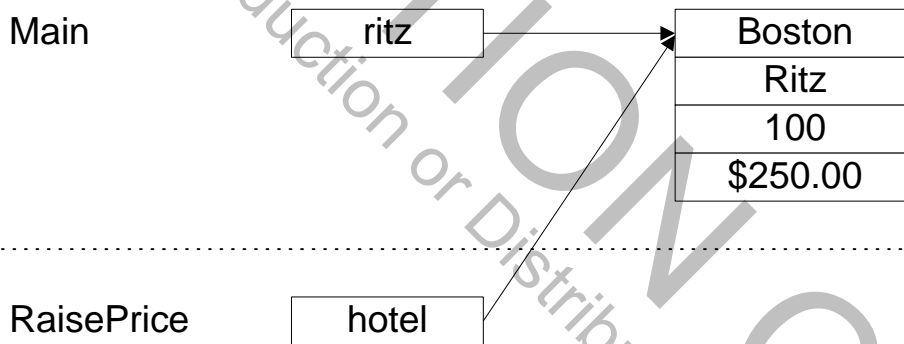

- Thus, when you change the price in the **RaisePrice()** method, the object in **Main()** is the same object and shows the new price.

Method Overloading

- **In a traditional programming language, such as C, you need to create unique names for all of your methods.**
- **If methods basically do the same thing, but only apply to different data types, it becomes tedious to create unique names.**
 - For example, suppose you have a **FindMax()** method that can find the maximum of two **int**, two **long**, or two **string**.
 - If we need to come up with a unique name for each method, we would have to create method names, such as **FindMaxInt()**, **FindMaxLong()**, and **FindMaxString()**.
- **In C#, as in other object-oriented languages such as C++ and Java, you may *overload* method names.**
 - That is, different methods can have the same name, if they have different **signatures**.
 - Two methods have the same signature if they have the same number of parameters, the parameters have the same data types, and the parameters have the same modifiers (none, **ref**, or **out**).
 - The return type does not contribute to defining the signature of a method.
 - So, in order to have two functions with the same name, there must be a difference in the number and/or types and/or modifiers of the parameters.

Method Overloading (Cont'd)

- **At runtime, the compiler will resolve a given invocation of the method by trying to match up the actual parameters with formal parameters.**
 - A match occurs if the parameters match exactly or if they can match through an implicit conversion.
 - For the exact matching rules, consult the C# Language Specification.
- **The program *OverloadDemo* illustrates method overloading.**
 - The method **FindMax()** is overloaded to take either **long** or **string** parameters.
 - The method is invoked three times, for **int**, **long**, and **string** parameters.
 - There is an exact match for the case of **long** and **string**.
 - The call with **int** actual parameters can resolve to the **long** version, because there is an implicit conversion of **int** into **long**.

Variable Length Parameter Lists

- Our *FindMax()* methods in the previous section were very specific with respect to the number of parameters—there were always exactly two parameters.
- Sometimes you may want to be able to work with a variable number of parameters, for example, to find the maximum of two, three, four, or more numbers.
- C# provides the *params* keyword, which you can use to indicate that an array of parameters is provided.
 - Sometimes you may want to provide both a general version of your method that takes a variable number of parameters and also one or more special versions that take an exact number of parameters.
 - The special version will be called in preference, if there is an exact match. The special versions are more efficient.
- The program *VariableMax* illustrates a general *FindMax()* method that takes a variable number of parameters.
 - There is also a special version that takes two parameters.
 - Each method prints out a line identifying itself, so you can see which method takes precedence.

Arrays

- **An array is a collection of elements with the following characteristics:**

- All array elements must be of the same type. The element type of an array can be any type, including an array type. An array of arrays is often referred to as a jagged array.
- An array may have one or more dimensions. For example, a two-dimensional array can be visualized as a table of values. The number of dimensions is known as the array's rank.
- Array elements are accessed using one or more computed integer values, each of which is known as an index. A one-dimensional array has one index.
- In C#, an array index starts at 0, as in other C family languages.
- The elements of an array are created when the array object is created. The elements are automatically destroyed when there are no longer any references to the array object.

One-Dimensional Arrays

- **An array is declared using square brackets [] after the type, not after the variable.**

```
int [] a;    // declares an array of int
```

- Note that the *size* of the array is not part of its type.
- The variable declared is a *reference* to the array.

- **You create the array elements and establish the size of the array using the *new* operator.**

```
a = new int[10];    // creates 10 array elements
```

- The new array elements start out with the appropriate default values for the type (0 for `int`).

- **You may both declare and initialize array elements using curly brackets, as in C/C++.**

```
int [] a = {2, 3, 5, 7, 11};
```

- **You can indicate you are done with the array elements by assigning the array reference to *null*.**

```
a = null;
```

- The garbage collector is now free to deallocate the elements.

System.Array

- **Arrays are objects.**
 - **System.Array** is the abstract base class for all array types.
- **Accordingly, you can use the properties and methods of *System.Array* for any array.**

```
Array.Sort(a);           // sorts the array
for (int i = 0; i < a.Length; i++)
    Console.Write("{0} ", a[i]);
Console.WriteLine();
```

- **For a sample array program, see *ArrayDemo*.**

Jagged Arrays

- **You can declare an array of arrays, or a “jagged” array.**

- Each row can have a different number of elements.

```
int [][] binomial;
```

- **You then create the array of rows, specifying how many rows there are (each row is itself an array):**

```
binomial = new int [rows][];
```

- **Next you create the individual rows:**

```
binomial[i] = new int [i+1];
```

- **Finally, you can assign individual array elements:**

```
binomial[0][0] = 1;
```

- **The example program creates and prints Pascal’s triangle.**

- See **Pascal**.

```
1
1 1
1 2 1
1 3 3 1
1 4 6 4 1
```

- **Higher-dimensional jagged arrays can be created following the same principles.**

Rectangular Arrays

- **C# also permits you to define rectangular arrays.**

- All rows have the same number of elements.

- **First you declare the array:**

```
int[,] MultTable;
```

- **Then you create all of the array elements, specifying the number of rows and columns:**

```
MultTable = new int[rows, columns];
```

- **Finally, you can assign individual array elements:**

```
MultTable[i,j] = i * j;
```

- **The *RectangularArray* program creates and prints out a multiplication table.**

```
0 0 0 0 0
0 1 2 3 4
0 2 4 6 8
0 3 6 9 12
0 4 8 12 16
```

- **Higher dimensional rectangular arrays can be created following the same principles.**

foreach for Arrays

- **C# provides a *foreach* loop that can be used to iterate through the elements of an array.**
- **The sample code used nested *foreach* loops to print all of the elements of a jagged array on the same line.**
 - See Pascal.

```
foreach (int[] row in binomial)
{
    foreach (int x in row)
    {
        Console.Write("{0} ", x);
    }
    Console.WriteLine();
}
```

Boxing and Unboxing

- **One of the strong features of C# is that it has a unified type system.**
- **Every type, including the simple built-in types, such as *int*, derive from *System.Object*.**
 - In C#, everything is an object.
- **A language such as Smalltalk also has such a feature, but pays the price of inefficiency for simple types.**
- **Languages such as C++ and Java (before Java 5.0) treat simple built-in types differently than objects, thus obtaining efficiency, but at the loss of a unified type system.**
- **C# enjoys the best of both worlds through a process known as “boxing.”**
 - “Boxing” converts a value type, such as an **int** or a **struct**, to an object and does so implicitly.
 - “Unboxing” converts a boxed value type (stored on the heap) back to an unboxed, simple value (stored on the stack).
Unboxing is done through a type cast.

```
int x = 5;
object o = x;           // boxing
x = (int) o;           // unboxing
```

- **But there is a performance penalty from boxing and unboxing.**

Implicitly Typed Variables

- **The *var* keyword lets you declare and initialize a variable without explicitly specifying a type.**
 - But the variable still has a type, inferred from the expression on the right-hand side.

```
var num = 55;  
// type is Int32  
  
var word = "Hello!";  
// type is String
```

- The C# **var** is *not* a “variant” data type, such as **var** in JavaScript.

- **The *var* keyword can also be used to declare and initialize an array.**

```
var primes = new[] { 2, 3, 5, 7, 11 };  
// type is Int32[]
```

Implicitly Typed Variables – Example

- **See *ImplicitType*.**

```
static void Main(string[] args)
{
    var num = 55;
    ShowObject(num);
    ShowTypeInfo(num);

    var word = "Hello!";
    ShowObject(word);
    ShowTypeInfo(word);

    var primes = new[] { 2, 3, 5, 7, 11 };
    ShowArray(primes);
    ShowTypeInfo(primes);

    var words = new [] {"one", "two", "three"};
    ShowArray(words);
    ShowTypeInfo(words);
}
```

- **Here is the output:**

```
55
Type = Int32
Base class = System.ValueType
Hello!
Type = String
Base class = System.Object
2 3 5 7 11
Type = Int32[]
Base class = System.Array
one two three
Type = String[]
Base class = System.Array
```

Output in C#

- **Simple output (e.g. for debugging) for various data types can be done using *Console.WriteLine()* method applied to a *string*.**
 - The **ToString()** method of **System.Object** will provide a string representation for any data type.
 - For custom data types, you should override **ToString()**.
 - You can use the **+** concatenation operator for strings to build up an output string (a technique that can also be applied in other contexts, such as building a SQL query string).

```
int x = 24;  
int y = 26;  
Console.WriteLine("Product of " + x + " and "  
    + y + " is " + x*y);
```

- **Alternatively, you can use {0}, {1}, etc. as placeholders.**

```
Console.WriteLine("Product of {0} and {1} is {2}",  
    x, y, x*y);
```

Output:

Product of 24 and 26 is 624

Formatting

- **C# has extensive formatting capabilities, which you can control through the placeholders.**

- Simplest: {n}, where n is 0, 1, 2, ...
- Control width: {n,w}, where w is width (positive for right-justified and negative for left-justified)
- Format string: {n:S}, where S is a format string
- Width and format string: {n,w:S}

- **A format string consists of a format character followed (optionally) by a precision specifier.**

Format Character	Meaning
C	Currency (locale specific)
D	Decimal integer
E	Exponential (scientific)
F	Fixed-point
G	General (E or F)
N	Number with embedded commas
X	Hexadecimal

Formatting Example

```
double pi = Math.PI;
decimal cost = 70.45m;
Console.WriteLine("{0,30}", pi);
// width 30
Console.WriteLine("{0,-30}", pi);
// left justified
Console.WriteLine("{0,30:F}", pi);
// fixed point
Console.WriteLine("{0,30:F4}", pi);
// precision 4
Console.WriteLine("{0,30:C}", cost);
// currency
```

Output:

```
3.1415926535897931
3.1415926535897931
3.14
3.1416
$70.45
```

– See **FormatDemo**

Exceptions

- **C# provides an exception mechanism similar in concept to exceptions in C++ and Java.**
- **Exceptions are implemented by the Common Language Runtime, so exceptions can be thrown in one .NET language and caught in another.**
- **The exception mechanism involves the following elements:**
 - Code that might encounter an exception should be enclosed in a **try** block.
 - Exceptions are caught in a **catch** block.
 - An **Exception** object is passed as a parameter to **catch**. The data type is either **System.Exception** or a derived type.
 - You may have multiple **catch** blocks. A match is made based on the data type of the **Exception** object.
 - An optional **finally** clause contains code that will be executed whether or not an exception is encountered.
 - In the called program, an exception is raised through a **throw** statement.

Exception Example

- See *ExceptionDemo\Step1*.

```
using System;

class Program
{
    ...
    static void Main(string[] args)
    {
        int prod;
        long lprod;
        try
        {
            ...
            prod = CheckedMultiply(56666, 57777L);
            Console.WriteLine("product = {0}", prod);
        }
        catch (OverflowException e)
        {
            Console.WriteLine(
"Overflow Exception: {0}", e.Message);
            Console.WriteLine(
"Overflow Exception: {0}", e);
        }
        catch (Exception e)
        {
            Console.WriteLine(
"Exception: {0}", e.Message);
            Console.WriteLine("Exception: {0}", e);
        }
        Console.WriteLine("count = {0}", count);
        return 0;
    }
}
```

Checked Integer Arithmetic

- **By default in C#, integer overflow does not raise an exception.**

- Instead, the result is truncated.
- The **checked** operator will cause the integer calculation to check for overflow and throw an exception if an overflow condition arises.
- You can cause all integer arithmetic to be checked via the **/checked** compiler command line switch.
- You can turn off checking by the **unchecked** operator.
- Unchecked arithmetic is faster, but less safe.

- **The following method can throw two different kinds of exceptions:**

```
private static int CheckedMultiply(  
object a, object b)  
{  
    int product = checked((int) a * (int) b);  
    count++;  
    return product;  
}
```

- The type casts can fail, resulting in **InvalidCastException**.
- The multiplication can overflow, resulting in **OverflowException**.

Throwing New Exceptions

- **In general, it is wise to handle exceptions, at least at some level, near their source.**
 - You have the most information available.
 - See `ExceptionDemo\Step2`.
- **A common pattern is to create a new exception object that captures more detailed information and throw this on to the calling program.**

```
private static int CheckedMultiply(
    object a, object b)
{
    int first, second;
    try
    {
        first = (int) a;
    }
    catch (InvalidCastException e)
    {
        count++;
        throw new Exception(
            "First operand is not an int", e);
    }
    try
    {
        second = (int) b;
    }
    catch (InvalidCastException e)
    {
        count++;
        throw new Exception(
            "Second operand is not an int", e);
    }
    ...
}
```

finally

```
...
try
{
    int product = checked(first * second);
    return product;
}
catch (OverflowException e)
{
    throw new Exception(
        "Integer overflow", e);
}
finally
{
    count++;
}
}
```

- **A *finally* block is always executed when control leaves a *try* block.**
 - In the example above, the counter is always incremented, whether or not an exception occurs.

System.Exception

- **The *System.Exception* class provides a number of useful methods and properties for obtaining information about an exception.**
- ***Message* returns a text string providing information about the exception.**
 - This message is set when the exception object is constructed.
 - If no message is specified, a generic message will be provided indicating the type of the exception.
 - The **message** property is read-only. (Hence, if you want to specify your own message, you must construct a new exception object, as done in the example above.)
- ***StackTrace* returns a text string providing a stack trace at the place where the exception arose.**
- ***InnerException* holds a reference to another exception.**
 - When you throw a new exception, it is desirable not to lose the information about the original exception.
 - The original exception can be passed as a parameter when constructing the new exception.
 - The original exception object is then available through the **InnerException** property of the new exception.

Lab 2

Implementing a Customers Class

In this lab, you will begin the Acme Travel Agency case study by implementing a simple Customers class in C#. You are provided with starter code that defines a class for an individual customer and a test program. You are to implement a class that can be used by Acme to keep track of customers who register for its services. Customers supply their first and last name, and email address. The system assigns a customer id. The following features are supported:

- Register a customer, returning a customer id
- Unregister a customer
- Obtain customer information, either for a single customer or for all customers (pass the customer id, and for customer id of -1 return all customers)
- Change customer's email address

Detailed instructions are contained in the Lab 2 write-up at the end of the chapter.

Suggested time: 60 minutes

Summary

- Every C# application has a class with a method *Main*, which is the entry point into the application.
- The *System* class includes methods for doing input and output, such as *ReadLine()* and *WriteLine()*.
- .NET has a large class library that is partitioned into namespaces.
- C# has control structures and operators similar to those in C and C++.
- C# has value, reference, and pointer data types.
- Through boxing and unboxing, C# achieves a unified type system, with all types acting as if they are derived from *object*.
- Built-in numeric types, *bool*, and *struct* are value types.
- Examples of reference types are *object*, *string*, and arrays.
- C# has a flexible parameter passing mechanism that can be controlled through *ref* and *out* keywords.
- C# has extensive formatting capabilities, which you can control through the placeholders.
- Exceptions in C# are implemented by the Common Language Runtime.

Lab 2

Implementing a Customers Class

Introduction

In this lab, you will begin the Acme Travel Agency case study by implementing a simple `Customers` class in C#. You are provided with starter code that defines a class for an individual customer and a test program. You are to implement a class that can be used by Acme to keep track of customers who register for its services. Customers supply their first and last name, and email address. The system assigns a customer id. The following features are supported:

- Register a customer, returning a customer id
- Unregister a customer
- Obtain customer information, either for a single customer or for all customers (pass the customer id, and for customer id of -1 return all customers)
- Change customer's email address

Suggested Time: 60 minutes

Root Directory: OIC\CsEss

Directories: Labs\Lab2\Acme (Do your work here)
CaseStudy\Acme\Step0 (Backup of starter files)
CaseStudy\Acme\Step1 (Answer)

Files: Customer.cs
Test.cs

Instructions

1. Build the starter program. There is a complete implementation of a `Customer` class and a stub implementation of a `Customers` class. There is also a test program. Examine the starter code and run the program. Notice that the test program handles exceptions. For example, the stub `GetCustomer` function returns a `null`, which is checked for in the test program. Also, if you enter non-numeric data when prompted for an id in the test program, an exception will be thrown.
2. Add to the `Customers` class declarations of the following private members: an array `customers` of type `Customer[]` and a variable `nextc` of type `int`. We will use `nextc` as the index of the next element to be added to the array, and it should be initialized to 0.
3. Add code to the `Customers()` constructor that will instantiate the customers array to have 10 elements and register some sample customers.

4. Add code in **RegisterCustomer** to instantiate a new **Customer** with the specified fields, store this customer in the array, increment **nextc**, and return the id of this new customer. (Note that an id is automatically generated by the constructor of **Customer**.)
5. Replace the stub code in **GetCustomer** by code that will assign **count** to be **nextc** and return **customers**. (Temporarily, we are trying to always return the entire array.) Build and test. No customers are being shown as returned. Why?
6. The parameter **count** is passed by value, and so its new value is not passed to the calling program. To fix this, we need to make it either a **ref** or an **out** parameter. Since it only does output, we make it an **out** parameter. Build. We get compiler errors. Why?
7. We also need to use the **out** modifier in the calling program **Test.cs**. Change this in the two places where **GetCustomer** is called. Build and run. Now you should see your sample data returned in response to the “customers” command. Also, the “register” command should be working, so that you can register additional customers.
8. Now we want to provide the full functionality of **GetCustomer**. If id of **-1** is passed, the entire array is passed back. Otherwise, an array of 1 element is created, having the customer information for the id that is provided. To implement this feature, first provide code for the helper method **FindId**. This method does a linear search for the given id. If not found, it returns **-1**. Otherwise it returns the index at which the id was found.
9. Now finish the implementation of **GetCustomer**. Build and test. Now you should be able to query for a single customer by id, as well as obtain the complete list of customers.
10. Implement **UnregisterCustomer**. If the customer is not found, throw an exception. Otherwise, delete the customer from the array. Move the elements after the deleted element up in the array, to fill the deleted item. Build and test.
11. Finally, implement **ChangeEmailAddress**. Build and test. Your miniature customer management system should now be completely working!

EVALUATION COPY
Unauthorized Reproduction Prohibited



7400 E. Orchard Road, Suite 1450 N
Greenwood Village, Colorado 80111
Ph: 303-302-5280
www.ITCourseware.com